



HOKKAIDO UNIVERSITY

Title	Numerical and mathematical approaches to analyses of water-circulator-induced flow in ponds
Author(s)	Nakazawa, T.; Suito, H.
Description	JSTさがけ研究集会 環境問題における数理の可能性. 平成20年6月11日～平成20年6月13日. 札幌市
Relation	JST Presto Symposium on Mathematical Sciences towards Environmental Problems (Hokkaido University technical report series in mathematics ; 136). pp.56-59.
Issue Date	2008-09
Doc URL	https://hdl.handle.net/2115/34742
Type	conference paper
File Information	tech136_p56-59.pdf



Numerical and mathematical approaches to analyses of water-circulator-induced flow in ponds

T. Nakazawa* and H. Suito*[†]

* Graduate school of environmental science, Okayama University, Japan.

[†] JST PRESTO Researcher

1. Introduction

Pollution and muddiness of natural and artificial reservoirs that are used to supply water irrigation have become important problems in recent years in Japan. One cause of such turbid waters in small reservoirs, in which water flow is less active, is that stagnation of oxygen and water decrease aerobic decomposition capacity. Insolation stratifies the water in such small lakes and ponds according to a temperature gradient: a so-called thermocline. Consequently, vertically circulating flow is strongly suppressed.

A rotating propeller operating at low speed set on a lake surface is proposed because it is expected that the device can induce vertical circulating flow. Typically, a three- or four-bladed propeller forces rotation of the water of the surface and vertical circulating flow is induced because of the centrifugal force. Although various experiments have shown clearly that the water quality in a lake is improved by operation of such equipment, the flow mechanism is not fully understood. To optimize such equipment, mathematical methods are strongly required.

2. Formulation of the problem

- **Coordinate**

To survey such a fluid motion mathematically in a simple system, cylindrical coordinates (r, θ, z) are adopted. A radius of the cylindrical coordinate is r_1 , a height of that is s and aspect ratio $\Gamma = \frac{s}{r_1}$. The flow confined between the top lid inducing a horizontal rotating flow, the bottom stationary lid, and the stationary wall are investigated here. Reynolds number is defined as

$$Re = \frac{\max(V(r,s))r_1}{\nu},$$

where $V(r,s)$ is the top boundary condition and ν is viscosity.

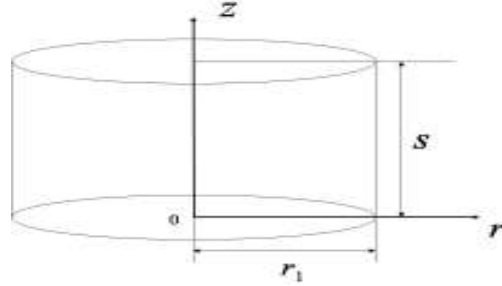


Fig. 1: Cylindrical coordinate.

- **The top lid**

We set

$$V(r, s) = a \cdot r \cdot \exp(1 - a \cdot r) \quad (1)$$

as the top lid boundary condition, where a is selected due to $V(r_1, s) \approx 0$.

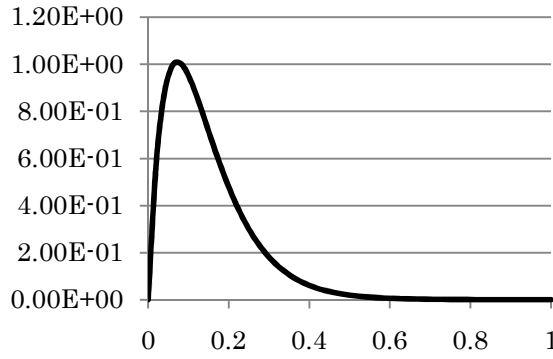


Fig. 2: A distribution of $V(r, s)$.

- **Governing equations**

Since we hope to obtain steady-state solutions numerically for $\Gamma = 1$ and $Re = 50$ and 1000 , we solve the time-dependent Navier-Stokes equation (2)-(4) and continuity equation (5) under some initial conditions and expect to obtain different steady-state solutions.

I. Momentum conservation law

$$\begin{aligned} \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial r} + \frac{v}{r} \frac{\partial u}{\partial \theta} + w \frac{\partial u}{\partial z} - \frac{v^2}{r} \\ = -\frac{\partial p}{\partial r} + \frac{1}{Re} \left(\frac{\partial^2 u}{\partial r^2} + \frac{1}{r} \frac{\partial u}{\partial r} + \frac{1}{r^2} \frac{\partial^2 u}{\partial \theta^2} + \frac{\partial^2 u}{\partial z^2} - \frac{u}{r} - \frac{2}{r^2} \frac{\partial v}{\partial \theta} \right) \end{aligned} \quad (2)$$

$$\begin{aligned} \frac{\partial v}{\partial t} + u \frac{\partial v}{\partial r} + \frac{v}{r} \frac{\partial v}{\partial \theta} + w \frac{\partial v}{\partial z} + \frac{uv}{r} \\ = -\frac{1}{r} \frac{\partial p}{\partial \theta} + \frac{1}{Re} \left(\frac{\partial^2 v}{\partial r^2} + \frac{1}{r} \frac{\partial v}{\partial r} + \frac{1}{r^2} \frac{\partial^2 v}{\partial \theta^2} + \frac{\partial^2 v}{\partial z^2} + \frac{v}{r} + \frac{2}{r^2} \frac{\partial v}{\partial \theta} \right) \end{aligned} \quad (3)$$

$$\frac{\partial w}{\partial t} + u \frac{\partial w}{\partial r} + \frac{v}{r} \frac{\partial w}{\partial \theta} + w \frac{\partial w}{\partial z} = -\frac{1}{r} \frac{\partial p}{\partial z} + \frac{1}{Re} \left(\frac{\partial^2 w}{\partial r^2} + \frac{1}{r} \frac{\partial w}{\partial r} + \frac{1}{r^2} \frac{\partial^2 w}{\partial \theta^2} + \frac{\partial^2 w}{\partial z^2} \right) \quad (4)$$

II. Mass conversation law

$$\frac{\partial u}{\partial r} + \frac{u}{r} + \frac{1}{r} \frac{\partial v}{\partial \theta} + \frac{\partial w}{\partial z} = 0 \quad (5)$$

In numerical computations, we assume that steady-state solutions have been obtained when residuals are under 10^{-4} .

● Initial conditions

We survey three kinds of initial conditions, Case 1, Case 2 and Case 3.

$$\text{Case 1} \begin{cases} u = 0 \\ v = 0 \\ w = 0 \end{cases}, \text{Case 2} \begin{cases} u = 0 \\ v = V(r, s) \\ w = 0 \end{cases}, \text{Case 3} \begin{cases} u = 0 \\ v = V(r, z) \\ w = 0 \end{cases}$$

In Case 3, a velocity component for the azimuthal direction, $V(r, z)$, is set as follows;

$$V(r, z) = \sum_{l=1}^{\infty} A_l J_1(k_l r) \sinh(k_l z) \quad (6),$$

where A_l is a constant number, J_1 is Bessel function of the first kind and k_l is zero points. $V(r, z)$ is zero on the axis and nearly equals zero on the wall.

3 Results and future works

● $Re = 50$

- I. It is considered that Case 1 and Case 2 are the same distributions.
- II. It is expected that flow fields converged the same distribution assuming Case 1 or Case 2 as initial conditions.
- III. A distribution of Case 3 is different from those of Case 1 and Case 2.

● $Re = 1000$

- I. It is expected that Case 1, Case 2 and Case 3 are not the same distributions.

It is planned that future works will include numerical investigations with respect to various Reynolds numbers and aspect ratios.

References

1. “Analysis of vertical convections in a cylindrical coordinate”, T. Nakazawa and H. Suito, Abstract of 2007 annual meeting of Japan society of fluid mechanics, 308 (2007).
2. “Note on a class of solutions of the Navier-Stokes equations representing steady rotationally-symmetric flow”, G. K. Batchelor, Q. J. Mech. Appl. Maths., 4, 29-41 (1951).
3. “Analytical solution for a steady flow of enclosed rotating disks”, A. Khalili and H.J. Rath, Z. angew Math Phys., 45, 670-680 (1994).
4. “The flow in a cylindrical container with a rotating end wall at small but finite Reynolds number”, Benson K. Muir, Phys. Fluids, 16(10), 3614-3626 (2004).
5. “Numerical solution of the Navier-Stokes equations for flows in the disk-cylinder system”, Hsien-Ping Pao, Phys. Fluids, 15 (1), 4-11 (1972).
6. “Transitions of axisymmetric flow between two corotating disks in an enclosure”, T. Miura and J. Mizushima, Fluid Dyn. Res., 39, 193-208 (2007).
7. “Three-dimensional instability of axisymmetric flow in circulating lid-cylinder enclosure”, A. Y. Gelfgat, P. Z. Bar-Yoseph and A. Solan, J. Fluid Mech, 438, 363-377 (2001).
8. “Observations of the flow produced in a cylindrical container by a rotating endwall”, M. P. Escudier, Exp. Fluids, 2, 179-186 (1984).
9. “Aerodynamics aspects of disk files”, E. Lennemann, IBM J. Res Develop., 18(6), 480-488 (1974).