HOKKAIDO UNIVERSITY

Title	Tunable two-dimensional polarization grating using a self-organized micropixelated liquid crystal structure
Author(s)	Amano, Reo; Salamon, Péter; Yokokawa, Shunsuke et al.
Citation	RSC advances, 8(72), 41472-41479 https://doi.org/10.1039/c8ra08557a
Issue Date	2018-12-12
Doc URL	https://hdl.handle.net/2115/72414
Rights(URL)	https://creativecommons.org/licenses/by/3.0/
Type	journal article
File Information	Supplementary information .pdf

Hokkaido University Collection of Scholarly and Academic Papers : HUSCAP

Electronic Supplementary Material (ESI) for RSC Advances.
This journal is © The Royal Society of Chemistry 2018

Electronic Supplementary Information (ESI)

Reo Amano,[1] Péter Salamon,[2] Shunsuke Yokokawa,[1] Fumiaki Kobayashi,[1] Yuji Sasaki,[1*] Shuji Fujii,[1] Ágnes Buka,[2] Fumito Araoka,[3] and Hiroshi Orihara[1]

1 Division of Applied Physics, Faculty of Engineering, Hokkaido University North 13 West 8, Kita-ku, Sapporo, Hokkaido 060-8628 (Japan)

2 Institute for Solid State Physics and Optics, Wigner Research Centre for Physics, Hungarian Academy of Sciences, H-1525 Budapest, P.O.B.49 (Hungary.)

3 RIKEN Center for Emergent Matter Science (CEMS), 2-1 Hirosawa, Wako, Saitama 351-0198 (Japan)

[*] Corresponding author: yuji.sasaki@eng.hokudai.ac.jp

Figure S1

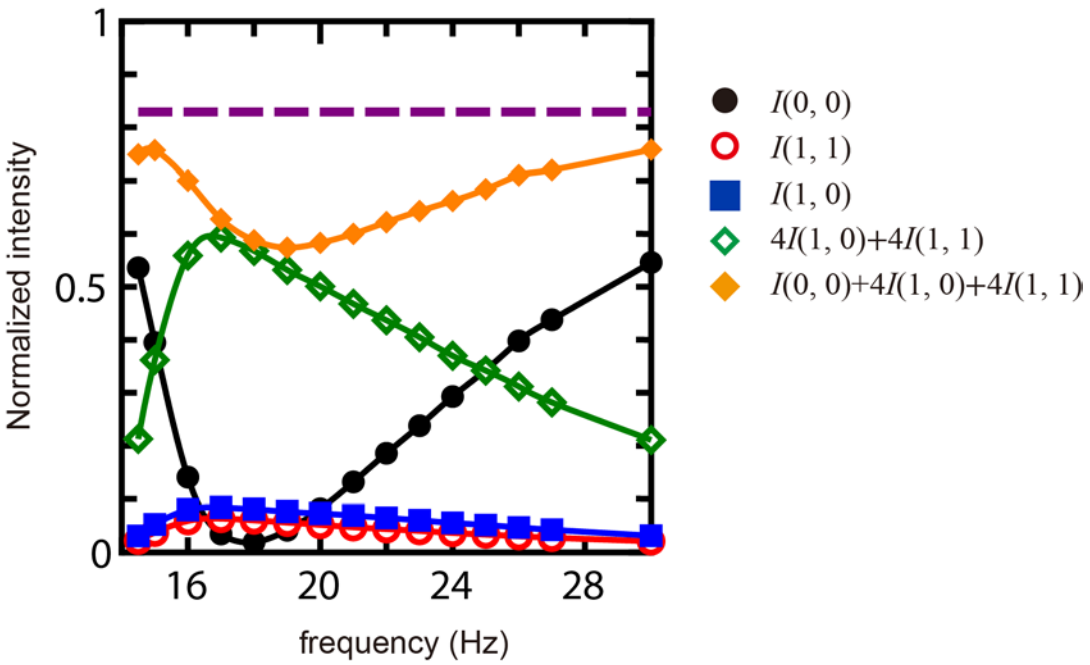


Figure S1. The intensity of diffracted light for each spot as a function of frequency. The sample thickness is 21 μm. The intensity is normalized with that of the incident beam. The dashed line is the total power of the light transmitted through the cell. In this case, the power meter is placed right behind the cell.