HOKKAIDO UNIVERSITY

Title	Development of a smart sprayer system for rice fields in the Vietnamese Mekong Delta
Author(s)	NGUYEN, TINH THANH
Degree Grantor	北海道大学
Degree Name	博士(農学)
Dissertation Number	甲第14212号
Issue Date	2020-09-25
DOI	https://doi.org/10.14943/doctoral.k14212
Doc URL	https://hdl.handle.net/2115/79576
Type	doctoral thesis
File Information	Nguyen_Tinh_Thanh.pdf

Hokkaido University Collection of Scholarly and Academic Papers : HUSCAP

Development of a smart sprayer system for rice fields in the Vietnamese Mekong Delta

(ベトナムメコンデルタ水田用スマート
防除システムの開発)

Hokkaido University
Graduate School of Agriculture
Division of Environmental Resource
Doctor Course

Nguyen Thanh Tinh

Table of contents

List of tables 4

List of figures 5

Acronyms and abbreviations 7

Chapter 1 Introduction 10

1.1 Introduction 10

1.1.1 Weed in rice fields 10

1.1.2 Herbicides for Weed control in rice fields 11

1.1.3 Common disease of rice in Vietnam Mekong Delta 17

1.1.4 Fungicides for disease control 20

1.1.5 Impact of pesticide in agriculture 21

1.2 Objective and goals 22

Chapter 2 Real-time detection of narrowleaf and broadleaf weeds 24

2.1 Introduction 24

2.2 Materials and methods 27

2.2.1 Methodology 27

2.2.2 Test equipment 30

2.2.3 Image processing for weed detection 31

2.3 Results and discussion 37

2.4 Conclusion 42

Chapter 3 Real-time of detection leaf blast and bacterial blight diseases 43

3.1 Introduction 43

3.2 Materials and methods 47

3.3 Results and discussion 60

3.4 Conclusion 65

Chapter 4 Development of a smart sprayer utilizing a commercialized sprayer 67

4.1 Introduction 67

4.2 Materials and methods 69

4.2.1 Smart sprayer hardware component 69

4.2.2 Image processing hardware and software development 74

4.3 Result and discussion 76

4.4 Conclusion 79

Chapter 5 Conclusions and recommendations 81

5.1 Conclusions 81

5.2 Recommendations 82

5.3 Contributions to knowledge 83

References 85

List of tables

Table 1 Quantity of commercial pesticides used in Vietnam from 1990-2003 16

Table 2 Commercial pesticides used in Vietnam from 1991-2004..... 16

Table 3 Pesticide using in Vietnam (2016)..... 21

Table 4 Faster R-CNN and Bounding blob methods detection result 41

Table 5 Results of Gaussian Naïve Bayes classifier with RGB color space. 60

Table 6 Result of Gaussian Naïve Bayes classifier with HSI color space. 60

Table 7 Results of KNN classifier with RGB and HSI color spaces. 61

Table 8 Comparison between Gaussian Naïve Bayes and KNN. 62

Table 9 Comparison processing times between Gaussian Naïve Bayes and KNN when increasing training dataset. 62

List of figures

Fig. 1 Common kind of weed in VND. 11

Fig. 2 Soil preparation. 12

Fig. 3 Mechanical weeding (Weeder tool). 13

Fig. 4 Pre-mergence herbicide application. 14

Fig. 5 International survey of herbicide-resistant weed. 15

Fig. 6 Different kinds of rice blast disease. 18

Fig. 7 Conidia of blast disease pathogen. 19

Fig. 8 Bacterial blight infected rice leaf and fields. 19

Fig. 9 Chart of distribution plant and chemical in agriculture. 22

Fig. 10 Two kinds of weeds (narrow leaf and broadleaf weed) from rice in VMD. 28

Fig. 11 Weed overview during the post-emergence stage. 29

Fig. 12 Equipment used for image collection on the rice fields in Vietnam. 30

Fig. 13 Architecture of the Faster R-CNN method. 32

Fig. 14 LabelImg tool. 33

Fig. 15 Bounding blob analysis algorithm process. 34

Fig. 16 Narrow leaf weed and broadleaf weed detection. 37

Fig. 17 Bounding rectangle characteristics for blob analysis. 37

Fig. 18 Weeds characteristic difference. 39

Fig. 19 Result of narrow leaf and broadleaf weed detection. 40

Fig. 20 Leaf blast disease on early stage. 45

Fig. 21 Leaf scald disease on early stage. 45

Fig. 22 Example of dataset training images. 49

Fig. 23 Preparing data set for training. 50

Fig. 24 Algorithm of LB and BB disease detection with RGB color space. 51

Fig. 25 Detection of LB and BB on rice leaves using the Gaussian Naïve Bayes classifier for RGB color spaces. 54
Fig. 26 Algorithm of LB and BB disease detection with HSI color space. 55
Fig. 27 Detection of LB and BB disease on rice leaves using Gaussian Naïve Bayes classifier from HSI color space. 56
Fig. 28 Feature subtraction. 57
Fig. 29 LB and BB disease detection result. 64
Fig. 30 LB and BB disease detection results by KNN method. 65
Fig. 31 Sprayer prototype. 69
Fig. 32 Accessories equipment and connection diagram of prototype. 71
Fig. 33 Utility vehicle (Iseki JK-14). 72
Fig. 34 Schematic diagram showing the main component of machine vision and individual nozzle section control setup. 72
Fig. 35 Sprayer boom and camera mounting design. 73
Fig. 36 The experiment setup of sprayer system into Iseki machine. 74
Fig. 37 Image processing program user interface development for see the number of detection and count number of sprayers. 75
Fig. 38 Device section and individual control nozzle. 76
Fig. 39 The calibration of volumnce of each sprayer. 77
Fig. 40 The calibration ROI of nozzle. 77
Fig. 41 Proper overlap with a flat-fan type nozzle on 0.4 m nozzle spacing. 78
Fig. 42 Experiment of real time detection and sprayer. 79

Acronyms and abbreviations

$\bar{a}$	average value
B	blue color mean value
cm	centimeters
CPU	central processing unit
Ex	Example
g	gram
G	green color mean value
GB	gigabyte
GHz	gigaherts
GPU	graphics processing unit
h	height of rectangle bounding blob
H_2S	Hydrogen Sulfide
ha	hectare
HSI	Hue, Saturation and Intensity
HSV	hue, saturation and value
K	bounding rectangle width to height ratio
kg	kilogram
kW	kilowatt
l	liter
LED	light-emitting diodes
m	meter
maxB	maximum value in blue
maxG	maximum value in green
maxK	maximum value in K

maxR	maximum value in red
minB	minimum value in blue
minG	minimum value in green
minK	minimum value in K
minR	minimum value in red
ml	milliliter
NN	Neural network
PC	laptop computer
pH	power of hydrogen
R	red color mean value
RAM	random access memory
R-CNN	Region-based convolutional neural network
RGB	Red, Green and Blue color space
ROI	region of interest
RPN	region proposal network
s	second
S_c	area of contour
S_r	area of rectangle bounding blob
SATA	serial advance technology attachment
UAVs	Unmanned aerial vehicles
var	variance value
VIPA	Vietnam Pesticide Association
VMD	Vietnamese Mekong Delta
w	width of rectangle bounding blob
WS	wheel steering

Acknowledgment

Many people need to be recognized for their help and support throughout my graduate studies at Vehicle Robotics Laboratory - Hokkaido University. First and foremost, I great gratitude to my supervisor Prof. Noboru Noguchi and Dr. Ricardo Ospina for their knowledgeable guidance and continued support that helps me accomplish my project. I am very thankful to Prof. Ishi and Prof. Okamoto for their support, guidance, time and expertise throughout my project deliverables. All my committee members have provided a vast amount of advice and inspiration over the past three years.

I thank Dr. Truong Chi Thanh (Yanmar Agriculture Research Institute – Can Tho University), Mr. Kunio Doi (Yanmar Group Company) for allowing me to take images of the spot seeding field and transplanting field projects in Dinh Thanh, An Giang, Viet Nam. I also thank Dr. Nguyen Thanh Tam (Mekong Delta Development Research Institute Can Tho University) for sharing his knowledge about the kinds of weeds and kind of diseases in rice fields.

This study was funded in part of Can Tho Univesity Improvement Project VN14-P6, supported by a Japanese ODA loan.

Chapter 1 Introduction

1.1 Introduction

1.1.1 Weed in rice fields

Weed in the rice fields are any plant which is not rice growing in a location where they are unwanted. Weeds typically are damaging to the rice crop and limit harvestable yields as they compete for water, nutrients, sunlight and space. Weed infestations are a concern for every farmer. Depending on the type of rice production system, farmers across Asia often contend with the same or similar weed species (Caton et al., 2010). Vietnam has tropical and subtropical plant ecosystems. Thus, a wide range of weed species occur, causing great interference to both lowland and upland crops. (Chin, 1995) estimated that ≈ 400 weed species occur in Vietnam, of which the *Poaceae* and *Cyperaceae* families are the most troublesome, with 167 species. The other nuisance weed families include *Asteraceae* (26 species), *Scrophulariaceae* (18), *Fabaceae* (14), *Lythraceae* (10) and *Laminaceae* (9). Another survey in the Red River Delta showed that 60 weed species belonging to 19 families were found in the rice fields, of which *Poaceae* and *Cyperaceae* accounted for 21 and 11 species, respectively, or 35% and 18% of total paddy weeds, respectively (Chin, 2001). *Echinochloa crus-galli* (barnyardgrass) and *L.chinesis* are probably the most damaging species in the entire Vietnamese rice fields. Base on the growth characteristics of weeds, we can classify weed become two groups that are narrow leaf weed and broadleaf weed.

Broadleaf (Dicotyledon weed). As the name implies, these usually have relatively wide leaf blades compared to grasses, whose leaves tend to be long, narrow and pointed. Narrow leaf weed (and other monocotyledon weed, grasses, sedges) have parallel venation, meaning that all of the veins in their leaves run parallel to one another. Fig. 1 shows the common kinds of weed in Vietnamese Mekong Delta (VMD), with a b c d are narrow leaf weed, e and f are

broadleaf weed.

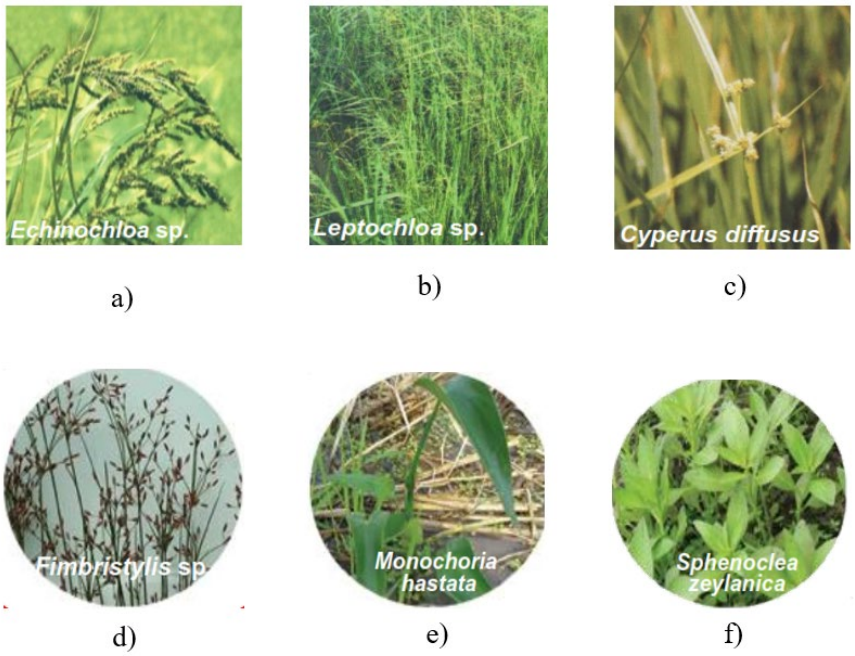

Fig. 1 Common kind of weed in VND.

a) Echinochloa colona. b) Leptochloa chinensis. c) Fimbristylis dichtoma.

e) Monochorina hastata. f) Sphenoclea zeylanica.

Weeds have been a major yield limiting factor in rice field. The reported (Chin et al., 2002), yield reductions as 46% caused by weed. In addition, weed make hard for harvesting and reduce rice product quality by weed seed mix with paddy rice gain. Weed is also main reason to increase diseases and desert for the field, weed become the house for desert and disease where it will be faster enlarging and damage all fields. The roof of weed may make to increase soil compact; it will make trouble for soil preparation.

1.1.2 Herbicides for Weed control in rice fields

Weed management is important to prevent losses in yield and production cost, and to preserve grain quality. Weed control should be practiced during specific stage of rice production. From the rice knowledge bank (IRRI, 2019) can device it to three stage which are during land

preparation, nursery stage and during early crop growth stage.

During land reparation stage: Land preparation should start 3-4 weeds before planting. Fig. 2 show that plowing and tillage destroys all the weeds in the cultivated areas and remaining stubble from previous crop. Weed should be allowed to grow before the next cultivation. Allow the weeds to emerge and come up. This reduces the number of weed seeds in the soil, and greatly reduce the weed for subsequent crop. Depending on weed population, plow and harrow several times before planting. In addition, a level field helps retain a constant water level that control weeds.

Fig. 2 Soil preparation.

In the nursery stage: when using soil mix for nursery bed, make sure the soil is clean and free of weed seeds. Remove all weed seedings from rice seedings during pulling and bunding to avoid planting weeds. Beside that the apply pre-emergence herbicide 2-3 DAS (Date after seeding).

During early crop growth: Depend on the planting method (Ex: transplanted, broadcast or drum seeded) management the weed the weed will be different way.

- Transplanted method: If applying pre-emergence herbicide which is apply before the germination of the target weeds. The requirement of that need to keep soil moist to saturated, dry soil reduces the performance of herbicide. If grass weeds are the main

weed problem, apply early post-emergence herbicide which is weed that are already grown. Otherwise, maintain a 5-7 cm water depth to prevent germination of weeds. If the herbicide and maintain water deep not effected, the weed still come up, other way may use mechanical weeding (Fig. 3) to control weed seedings that are 3-4 leaf stages.

Fig. 3 Mechanical weeding (Weeder tool).

- Broadcast and drum seeded method: Apply pre-emergence herbicide. Do not allow surface to dry after seeding. Flush irrigate as needed to keep the soil moist to saturated. A dried soil surface will reduce the performance pre-emergence herbicide (Fig. 4). Especially, apply the post-emergence herbicide at weeds have 2-3 leaf weeds, keep water depth on the field after apply herbicide 3-4 days to destroy the weed and prevent a new weed germinate and come up next.

Fig. 4 Pre-mergence herbicide application.

We have many methods to control the unwanted weeds in the rice fields such as hand weeding, weeder, mechanical machine and herbicide on during stage of rice production. But if comparison those methods which are effect and quickly to destroy the weed in the field that is herbicide. The herbicides were introduced in the 1960s and have been widely application since 1970 to until now. According to an international survey of herbicide-resistant weeds (Heap, 2019), the number of unique resistant cases (Unique resistant case can define the types of herbicide and site application) have been increasing year-by -years and so far, there have been no sign of decreasing (Fig. 5a). On Fig. 5b) shows rice is one of three crops cultivate that used the most herbicide species which is 51 species.

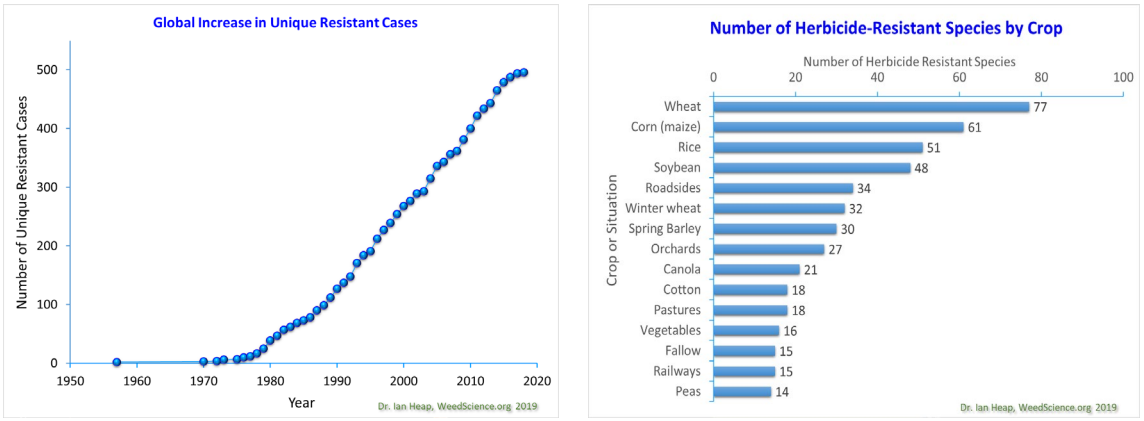

a) b)

Fig. 5 International survey of herbicide-resistant weed.

a) Unique resistant case graphs. b) Herbicide-resistant species by crop graphs.

Herbicide use for weed control began in 1970 in Vietnam, with the introduction of common chemical such as 2,4-dichlorophnoxyacetic acid, 3,4-dichloroproprioranilide (propanil), (4-chloro-2-mythylphenoxy) acetic acid and pentachlorophenol (Chin, 2001). However, up to the end of the 1980s, very few types of herbicides were used, and mostly for spring crops in direct-sowing areas. In that period, the amount of herbicide used accounted for only ≈ 0.5% of total rice planting areas (Ministry of Agriculture and Rural Development 2004). Herbicide use markedly increased from the early 1990s. In 1991, herbicide application for weed control in rice in Vietnam was 900 ton, accounting for 4.3% of the total pesticide use, but in the following years, from 1992-1995, the herbicide quantities used in the paddy fields increased to 2600, 3000, 3500, and 3600 tons per year, respectively, or 10.6%, 11.8%, 15.1%, and 18.4% of total pesticides, respectively (Ministry of Agriculture and Rural Development 2004). The proportion of herbicides use in all agriculture production relative to other pesticides also has rapidly increased. From 1990-2003, the percentage of herbicides to total pesticides increased from 3.6-30.2%. In this period, the amount of total pesticides also expanded from 16.1-36.0 x103 tons, costing $16.1-254.2x106 (Table 1 and Table 2). In 2004, 266 commercial herbicides were used, compared to only 75 types in 1991. Sixteen of the most herbicides used in the rice fields are:

thiobencard, bensulfuron mythyl, bispyribac-sodium, butachlor, butachlor + propanil, cyhalofop-butyl, 2,4-D, ethoxysulfuron, fenoxaprop-P-ethyl, fenoxaprop-P-ethyl + 2,4-D +MCPA, metsulfuron methyl, metsufuron methyl +bensulfuron methyl, pretilachlor, pyrazosulfuron ethyl, oxadiazon, propanil, and thibencard +propanil (Chin, 2001).

Table 1 Quantity of commercial pesticides used in Vietnam from 1990-2003

Year	Insecticides (%)	Fungicides (%)	Herbicides (%)	Total (Tons x103)	Value (USD million)
1990	83.2	11.8	3.6	16.1	16.1
1992	74.1	11.5	10.6	24.4	24.1
1994	65.5	13.8	15.1	23.2	58.9
1996	52.3	22.7	21.2	32.8	124.2
1998	51.0	24.9	22.0	33.0	196.0
2000	50.1	27.4	19.7	33.6	201.3
2003	37.5	28.3	30.2	36.0	254.2

Table 2 Commercial pesticides used in Vietnam from 1991-2004

Year	Number of commercial products				Percentage (%)		
	Insecticides	Fungicides	Herbicides	Total	Insecticides	Fungicides	Herbicides
1991	37	27	11	75	48.1	35.1	14.3
1992	64	54	25	143	43.8	37.0	17.1
1994	174	78	56	308	54.5	24.4	17.5
1996	229	159	124	512	42.9	29.8	23.2
1998	267	216	160	643	36.7	29.6	21.9
2000	288	224	169	681	39.1	30.0	23.0

2002	394	287	206	887	44.4	32.3	23.2
2004	499	364	266	1129	44.2	32.2	23.6

1.1.3 Common disease of rice in Vietnam Mekong Delta

Disease is an abnormal condition that injures the plant or causes it to function improperly. Disease are readily recognized by their symptoms associated visible changes in the plant. The organisms that cause diseases are known as pathogens. Many species of bacteria, fungus, nematode, virus and mycoplasma like organisms cause disease in rice. Disorders or abnormalities may also cause by abiotic factors such as low or high temperature beyond the limits for normal growth of rice, deficiency or excess of nutrients in the soil and water, pH and other soil conditions which affect the availability and uptake of nutrient, toxic substances such as H_2S produced in soil, water stress and reduce light.

Many species disease in the rice field have been diagnosis from symptoms and causal organism by (Francisco et al., 2003). However, here we will cover only the common diseases of rice in VND which is the biggest rice field in Vietnam those cause by the pathogen.

The Mekong Delta is a vast rice-growing plant criss-crossed by canals and rivers. The yearly weather cycle in this region includes very wet on rain season as well as dry on hot season periods. Such weather can also lead to crop stress and favour some diseases, especially of the fungal disease caused by pathogens that moisture in the field. Indeed, waterlogging and poor drainage are major factors favouring the diseases in VMD. Furthermore, one third of the 90 rice variety could be under threat due to these changes. This context is favorable to the development of the fungal and bacterial diseases particularly rice blast disease and bacterial blight disease.

a) Rice blast disease (Pyricularia grisea (Cooke) Sacc.)

- Symptoms

The fungus attacks all aboveground parts of the rice plant. Depending on the site of the symptom rice blast is referred as leaf blast, collar blast, node blast and neck blast. In the leaf blast, the lesions on leaf blade are elliptical or spindle shaped with brown borders and gray centers (Fig. 6). Under favorable conditions, lesions enlarge and coalesce eventually killing the leaves. Collar blast occurs when the pathogen infects the collar that can kill the entire leaf blade. The pathogen also effects the node of the stem that turns blackish and breaks easily, this condition is called node blast. Neck of the panicle can also be infected. Infected neck is girdled by grayish brown lesion that makes panicle fall over when infection is severe. The pathogen also causes brown lesions on the branches of panicles.

Fig. 6 Different kinds of rice blast disease.

- Causal organism

Mature conidia are usually three celled or two septate (Fig. 7), pyriform (pear-shaped), hyaline or colorless to pale olive, 19-27 x 8-10 nm in size and exhibit a basal appendage at the point of attachment to the conidiophores. Conidia usually germinate from the apical or basal cells. The conidiophores are pale brown, smooth and straight, or bending. The perfect stage is rarely found in the field.

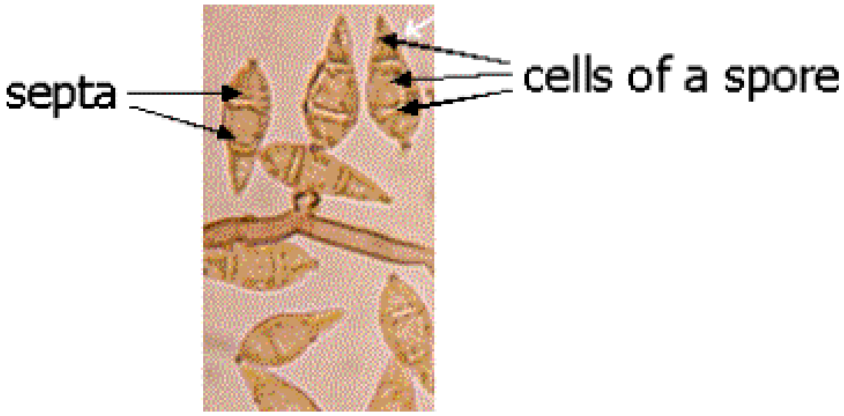

Fig. 7 Conidia of blast disease pathogen.

b) Bacterial blight (Xanthomonas oryzae pv. oryae (Ishiyama) Swing et al.)

- Symptoms

Water-soaked lesson usually starting at leaf margins, a few cm from the tip, and spreading towards the leaf base; affected areas increase in length and width, and become yellowish to light brown due to drying; with yellowish border between dead and green areas of the leaf (Fig. 8). It is usually observed at maximum tillering stage and onwards. In severely diseased fields grains may also be infected. In the tropics infection may also cause withering of leaves or entire young plants and production of pale-yellow leaves at the later stage of the growth.

Fig. 8 Bacterial blight infected rice leaf and fields.

1.1.4 Fungicides for disease control

Rice diseases are very dangerous. Especially, fungal leaf blast and bacterial blight disease which are two common disease that can directly affected to rice yield. There are many methods to preventively and treatment diseases on rice such as cultural, nutrient, chemical, biological, forecasting, botanical management and use of resistant cultivar (Rijal et al., 2019). This paper proposed that labor cost and time are major causes which makes unable to complete control blast disease. For the productive results and increase in production of rice must followed integrated management of rice blast. Isoprothiolane @ 1.5 ml/l and Tricyclazole 22 % + Hexaconazole 3% SC (thrice from booting stage at weekly interval) are best chemical, Pseudomonas fluorescens strain Pf1 @ 10g/kg, SPM5C-1 and SPM5C-2 (aliphatic compounds obtained from Streptomyces sp), Bacillus tequilensis (GYLH001) and pseudomonad EA105 effectively inhibit the growth of M. oryzae. Gene Pyramiding and use of multiline varieties is efficient and able to overcome pesticide hazards. Neem extract 4ml/15ml, Coffee arabica@25%, Nicotiana tabacum@10% are effective, garlic extract @higher doses and neem extract @ 4ml/15 ml are best for complete control. 4 g Si/L in green house condition observed greatest reduction of blast incidence. Among them development of variety and Biological are best option.

The seed treatment with benomyl (0.3%) and Pseudomonas fluorescens (0.5%) to rice seeds along with cultural practices like soil application of rice husk ash (RHA) at sowing on raised beds @ 1 kg m-2 as well as soil application of rice straw (RS) @ 2 tones ha-1 at transplanting followed by three sprays of propiconazole (0.1%) or carbendazim (0.1 %) at 15 days interval starting first spray at disease appearance are recommended as a integrate disease management module for effective management of leaf blast, neck blast and node blast diseases and increasing the grain and straw yields of paddy as well as monitory returns. This recommend was proposed by (Balgude et al., 2019).

Beside to choosing good resistant varieties of rice, using chemical for treatment seeds before seeding, a void use high amount of fertilizer and reasonable planting density to prevent blast and bacterial blight disease. Farmers should be regularly to visit the fields to early detecting disease on early stages, using the fungicides to spray directly on areas with disease to avoid diseases enlarge and affected to rice yield.

1.1.5 Impact of pesticide in agriculture

Pesticides can further be divided based on their function (Example: herbicide, fungicide, insecticides, biopesticides, etc.). Pesticides are often considered a quick, easy, and inexpensive solution for controlling weeds, diseases and insect pests in agriculture. However, pesticide use comes a significant cost. Pesticides has contaminated almost every part of our environment. Pesticides residues are found in soil and air, and in surface and ground water across the countries, and urban pesticide uses contribute to the problem. Pesticide contamination poses significant risks to the environment and not-target organisms ranging from beneficial soil misconceptions, even herbicides can cause harm to the environment. In fact, weed killer can be especially problematic because they are used in relatively large volumes (Aktar et al., 2009). According to Vietnam Pesticide Association (VIPA) on 2015 said that 67% of the population and near half of the worker who live in rural areas where the environment has been polluted by pesticides. Vietnam have a biggest rice cultivate which is 7 million hectares, parallel of that a large amount of pesticide was used.

Table 3 Pesticide using in Vietnam (2016)

No.	Kind of pesticide	Number of active ingredient (AI)	Number of product name
01	Insecticides	700	3.705
02	Fungicides	581	1.238

03	Herbicides	232	681
04	Rodenticides	11	27
05	Growth regulators	45	136
06	Molluscicides	25	140
07	Other	58	77

Source: Vipesco's marketing department

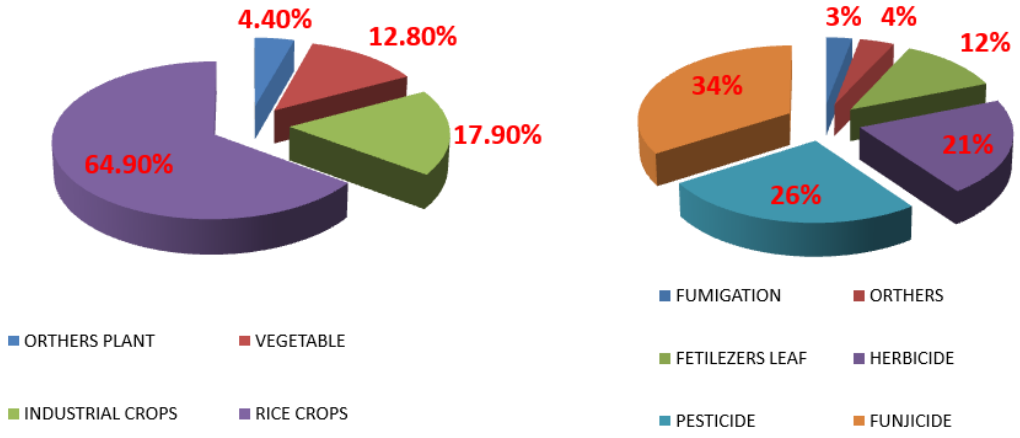

Pesticide consumption using in 2015: 1.25 billion USD

Fig. 9 Chart of distribution plant and chemical in agriculture.

The habit of using large amounts of pesticides to ensure high yield productivity has pushed Vietnam's agriculture to a dangerous situation, especially the health of farmers seriously affected. With current challenges in agriculture, Vietnamese government and the Ministry of Agriculture and Rural Development have registration policy for commercial pesticide on the market. Beside of that recommendations for farmer should be control using pesticides as limited and following caution of agriculture expert, increase using organic agriculture and sustainable agriculture in the future.

1.2 Objective and goals

The overall objective is the development of an effective smart sprayer system for spot application of agrochemicals in rice fields. The detailed objectives of this study were to:

a. Develop a prototype sprayer for spot application of agrochemicals in rice field.
b. Image processing program for real time detection broadleaf weed and narrow leaf weed in rice field from RGB camera capture.
c. Image processing program for real time detection fungal leaf blast disease and bacterial blight disease in rice field from RGB camera capture.
d. Design full smart sprayer system in rice field.

Chapter 2 Real-time detection of narrowleaf and broadleaf weeds

This chapter introduces an image processing method capable of performing real-time detection of two kinds of weeds in the rice fields of the Vietnamese Mekong Delta (VMD). Two image processing methods were applied and compared in this research: Faster region-based convolutional neural network (R-CNN) and bounding blob analysis. The input images were recorded using a red, green, and blue (RGB) camera. The weeds detection accuracy and processing time were estimated for each method using the same image source data from Vietnam. Both methods were able to detect narrow-leaf and broadleaf weeds on the weed post-emergence stage under uncontrolled light conditions in the rice fields. The results show that bounding blob analysis is simple but effective, with a shorter processing time and higher accuracy than Faster R-CNN.

2.1 Introduction

Agricultural production in Vietnam is facing increasing environmental impacts due to the use of large amounts of herbicide on various species of crops. According to an international survey of herbicide-resistant weeds (Heap, 2019), the types of herbicide and site application have been increasing year-by-year. The reason for this is that agricultural productivity and product quantity need to be increased to cover the food demands of a global population of more than 7 billion. Vietnam has an agriculture-based economy and is a top rice exporter in the world market. The country's land area is 65% cultivated land ranging from the north to the south, with cultivated land especially concentrated in the Mekong Delta, which is the biggest cultivated region in Vietnam. The government has issued many special policies designed to increase the quantity and productivity of rice (Dung et al., 1999). The traditional herbicide application method consists of spraying large amounts of herbicide over the whole surface of the rice fields due to the lack of an effective and efficient method to detect weeds. Such a weed-

detection method would allow the use of spot spraying. However, using large amounts of herbicides causes damage to the environment and to human health and has an adverse effect on sustainable agriculture. Therefore, plant protection that is focused on eliminating weeds and controlling the amount of herbicide applied has been an important topic of research over the last few years. Many results reported in the literature show developments in the detection of weeds (Tian, 2002), such as the development of a real-time spraying system that can work under variable lighting conditions by using multiple CCD cameras to cover the target area. In this case, the weed infestation conditions in each of the zones were detected, and then each individual spray nozzle applied herbicide to the specific weed zone. In other research (Bossu et al., 2008), a monochrome CCD camera was used to collect images. Then, by using the Gabor filter and a region-based segmentation and blob-coloring method, it is possible to detect only inter-row weeds. By using the camera pinhole model to transform the weed patch image coordinates to real-world coordinates, it is possible to spray weeds at the right moment. However, the method used in this research cannot detect intra-row weeds. Another application (Burgos-Artizzu et al., 2011) successfully discriminates between weed patches and crop rows under uncontrolled lighting conditions in real time. This research introduced the combination of a fast image processing method that delivered results in real time (Fast Image Processing) and a slower and more accurate processing method (Robust Crop Row Detection). This latter method showed very high accuracy, with an average weed detection rate of 95% and a crop detection rate of 80% in maize fields. However, this method cannot detect intra-row weeds either. In addition, another study (Aravind et al., 2015) reported a method of detecting broadleaf weeds mixed with narrow leaf plants, and also used nozzle sprayers for the real-time application of herbicide on the weed area. This method determines the number of white pixels present in a region of interest (ROI) after image binarization; regions with a white pixel count higher than the predefined threshold is considered to be weeds. The error in this technique

increases when the plant density of the crop is unbalanced due to natural variations in the vegetation.

Some recent research has shown the detection of plants mixed with weeds under difficult conditions by using deep learning convolution neural network (CNN) algorithms (dos Santos Ferreira et al., 2017), and also showed the application of CNN for the detection of two kinds of weeds, both grass and broadleaf weeds, in soybean fields. A large image data set (15,000 images) captured by unmanned aerial vehicles (UAVs) was used to train the algorithm, giving a 99.5% average accuracy. However, this result cannot be applied in real-time weed detection. Another study (Barrero et al., 2016) presented a method of detecting weed plants in rice fields through the use of neural networks (NN). The trained NN obtained a 99% detection accuracy. However, the processing and detection take a lot of time during the mature weed stage. A different approach (Dyrmann et al., 2017) uses a fully convolutional NN for the detection of weeds in cereal fields. The results show that the algorithm can detect 46% of weeds in a field, even though many of the weeds overlap with wheat plants. However, this algorithm encounters problems in detecting very small weeds.

All current research shows that the methods of detecting weeds among crops have different advantages and disadvantages. Almost all of the methods studies were applied to vegetable crops and could only detect inter-row weeds; some other studies showed that some conditions for detection, such as weed overlap with the crops, were very difficult to work with. Some studies showed highly accurate weed detection results, but they have no practical use if the image processing speed is too low. Moreover, there is no application that can be adapted to the conditions of the rice fields of the Vietnamese Mekong Delta (VMD), such as the detection of both intra-row weeds and inter-row weeds and the identification of at least two kinds of weeds. Identifying two different kinds of weeds is a matter of importance, because different kinds of weeds require different types and amounts of herbicide. In addition, an application with

sufficient image processing speed that makes it possible to perform real-time weed detection is also necessary because it could be used in a real herbicide spraying system.

This study aims to resolve these problems by implementing an image processing method capable of identifying in real time the two main kinds of weeds present in the rice fields of the VMD. The image processing method is intended to be used in a smart spraying system in the future. The Faster region-based convolutional neural network (R-CNN) algorithm is presented as the first alternative due to its increasing popularity and its capability to detect many kinds of objects quickly and accurately. An alternative method consisting of bounding blob analysis is also presented. Despite its simplicity, the bounding blob method has been used in many kinds of object-detection applications and has shown high accuracy and real-time detection, thus proving its effectiveness and efficiency. Both methods were evaluated for the detection of two kinds of weeds, that is narrow-leaf and broadleaf weeds, during the post-emergence stage under uncontrolled light conditions in several rice fields of the VMD. The processing time and accuracy of each method will be estimated as the main parameters with which to judge which method can be practically applied in a smart sprayer in the future.

2.2 Materials and methods

2.2.1 Methodology

Weed infestation is a concern for every famer. Depending on the type of rice production system, farmers across Asia often contend with the same or similar weed species. The common weeds present in rice fields across Vietnam are not different from the common weeds throughout Asia. There are several types of commercial herbicides available based on the biological characteristics of weeds. Typically, there are two main kinds of weeds present in the rice fields of the VMD, as shown in Fig. 10. *Echinochloa colona* and *Fimbristylis dichotoma* can be classified as broadleaf types, whereas *Commelina benghalensis* and *Cphenoclea zeylanica* can

be classified as narrow-leaf types (Caton et al., 2010). Fig. 10 clearly shows how these different varieties of weeds exhibit different physiological features such as color, shape, size, and number of leaves. It is possible to take advantage of these physiological features to develop an image processing algorithm that makes it possible to detect and classify the two main types of weeds.

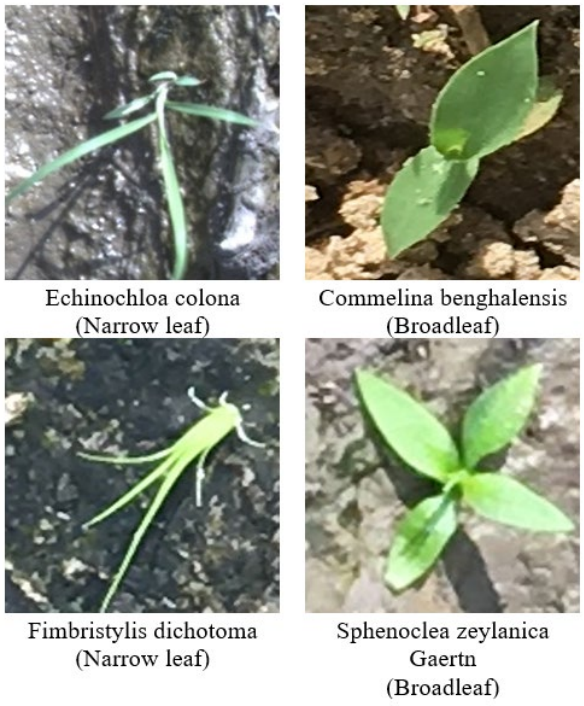

Fig. 10 Two kinds of weeds (narrow leaf and broadleaf weed) from rice in VMD.

There are three stages of weed development during crop growth that determine the application of the herbicide (IRRI, 2018), namely the pre-emergence stage, the post-emergence stage, and the mature stage. During the pre-emergence stage the weeds might have germinated, but they have not come out of the ground yet. Since the occurrence and position of the weeds remain unknown, the application of herbicide must take place over the whole planted area. During the post-emergence stage, the weeds have already germinated and have 2 to 3 leaves at around 10 to 15 days after the sowing of the rice plants; this condition is shown in Fig. 11. In the mature weed stage, the weeds have grown up and are clearly visible on the field. The pre-emergence

and mature stages require high amounts of herbicide, causing pollution of the environment. When the weeds are mature, it is necessary to apply a stronger type of herbicide at a higher rate. Higher concentrations of herbicide affect and may even destroy the rice plants, particularly in the panicle initiation and rice-flowering stages. Destroying weeds during the post-emergence stage shown in Fig. 11 makes it possible to use less herbicide by directly spraying only where the weeds are located. Moreover, early weed management helps to maintain the nutrients in the soil and maintain space for rice tillering. In this stage, it is advantageous to apply image processing algorithms to distinguish among weeds, rice plants, and soil because it is possible to identify characteristics like the weed's location, different leaf sizes, and different leaf colors, even if the rice leaves and weed leaves overlap. This research is particularly original because it addresses these unique characteristics of the rice fields in the VMD and this target problem.

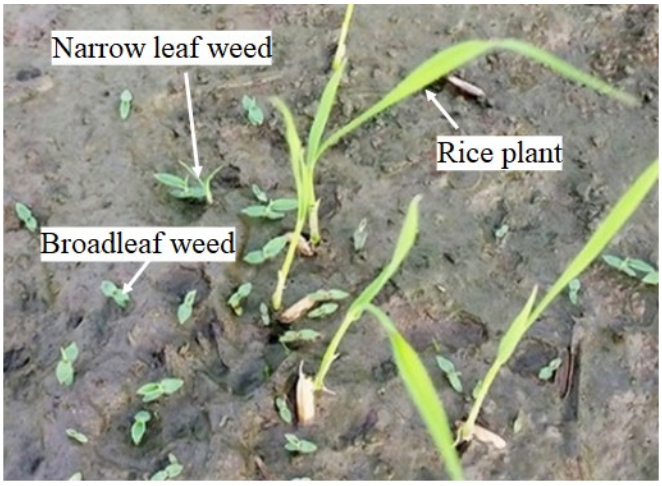

Fig. 11 Weed overview during the post-emergence stage.

The sample images were taken of both rice transplanting fields and rice spot-seeding fields at different locations in the VMD, namely in Dinh Thanh Agricultural Research Center, Loc Troi Group, and An Giang Province. In Chau Thanh Ward and Tra Vinh Province, images were taken of broadcasting fields. The sample images were taken at various locations inside the field and at different times of the day under uncontrolled light conditions.

2.2.2 Test equipment

An industrial camera (The Imaging Source, DFK33UX264) equipped with a 6 mm lens was used to capture high resolution red, green, and blue (RGB) images 2048 x 2048 pixels in size. The industrial camera was connected to a laptop computer (Lenovo, ThinkPad X220) by a USB 3.0 port to store the images using IC Capture 2.4 software (The Imaging Source Asia Co., 2019). For the image processing, this research used the Python programming language, TensorFlow library, OpenCV library, and C++ programming language.

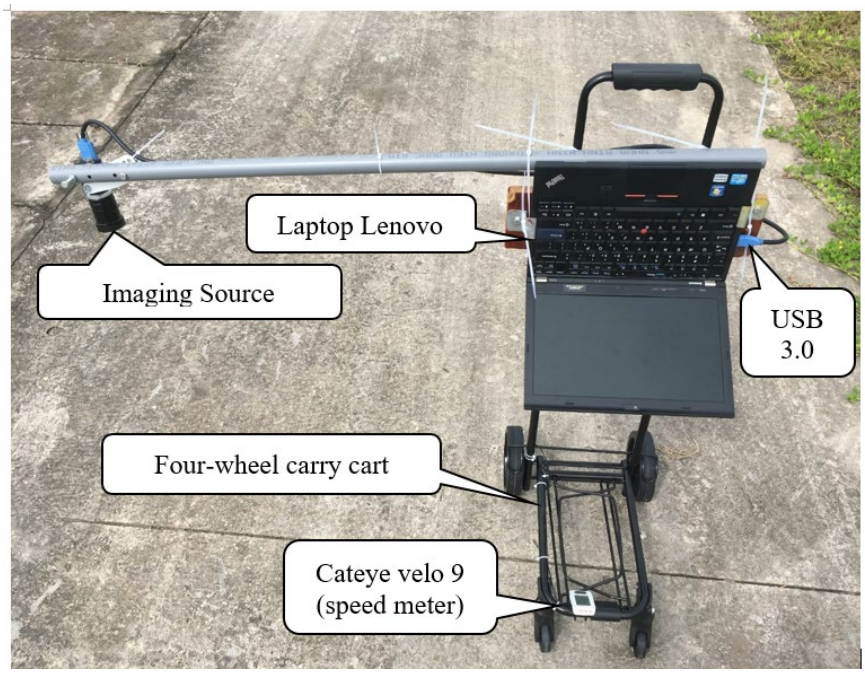

Fig. 12 Equipment used for image collection on the rice fields in Vietnam.

The experimental setup used for the collection of images from the field is shown in Fig. 12. The laptop computer was fixed to the four-wheeled carry cart. The distance from the camera to the ground was 0.50 m. In this study, the height of the camera was fixed to emulate the height of the nozzles in real sprayer systems. The experimental setup moved on the ground at an average velocity of 0.6 m/s. The velocity was measured and displayed on the screen of a cyclometer (Cateye, Velo 9). The cyclometer is a speed measurement device for bicycles. The speed of the camera traveling forwards was also measured because it was necessary to verify

that the conditions were the same as those occurring during herbicide spraying in the field, for example, by using a boom sprayer mounted on a tractor. Specifically, it was necessary to obtain an estimation of the image processing speed to guarantee the synchrony between shooting the images and activating the spraying nozzles according to the camera's traveling speed.

2.2.3 Image processing for weed detection

Two image processing methods were tested for the detection of two kinds of weeds, namely the Faster R-CNN method and the bounding blob analysis method. The Faster R-CNN method was tested using the Python programming language, the OpenCV library, and the TensorFlow library. The bounding blob analysis method was tested using the C++ programming language and the OpenCV library.

Faster R-CNN was introduced by (Ren et al., 2015). It is not the newest algorithm of machine learning. However, this algorithm is accurate, with a low graphics processing unit (GPU) time-delay and not very high hardware requirements. Faster R-CNN builds on the previous R-CNN and Fast R-CNN approaches to efficiently classify object proposals using deep convolutional networks. Compared to the previous approaches, Faster R-CNN employs a region proposal network (RPN) and does not require an external method for candidate region proposals. This method claims to be almost real-time fast, although it has some restrictions depending on the application (Zhang et al., 2016). Fig. 13 shows the architecture of the Faster R-CNN method. Basically, the Faster R-CNN consist of two networks; the first network is an RPN that generates candidate areas, or region proposals, which are regions in the input image where the object might be located. This network is contained in the dashed rectangle depicted in Fig. 13. The second network, represented by the steps outside the dashed rectangle depicted in Fig. 13, uses these region proposals to detect objects. The Faster R-CNN method's predecessor, the Fast R-CNN method, uses a selective search to generate region proposals, which is a time-consuming process. The time cost of generating these region proposals is much smaller in the RPN because

the RPN shares most of the computation with the object detection network. Simply explained, the RPN ranks region boxes (called anchors) and proposes those that most likely contain objects.

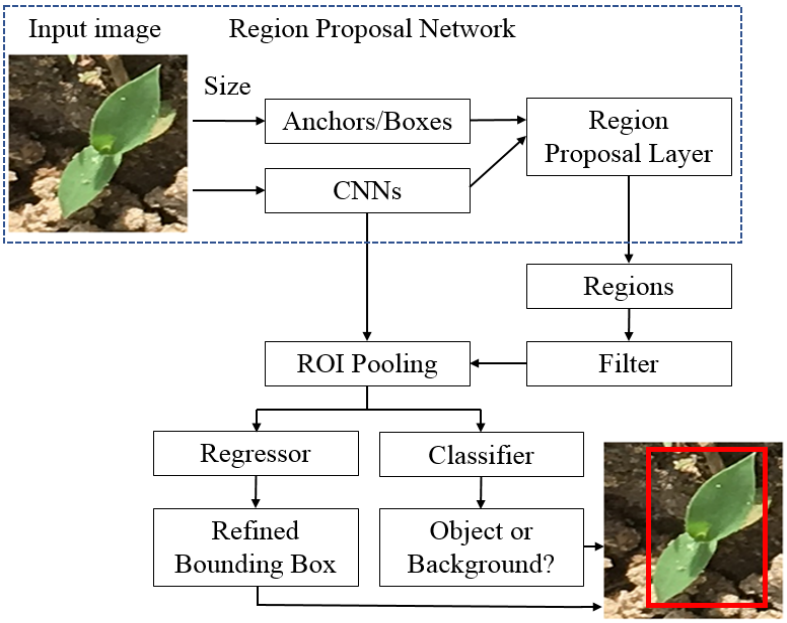

Fig. 13 Architecture of the Faster R-CNN method.

The RPN shown in Fig. 13 results in proposed regions with different sizes. Different-sized regions mean different-sized CNN feature maps. It is not easy to make an efficient structure that will work on features with different sizes. ROI pooling can simplify the problem by reducing the feature maps to be the same size. Unlike max-pooling, which has a fixed size, ROI pooling splits the input feature map into a fixed number k of roughly equal regions, and then applies max-pooling on every region. Therefore, the output of ROI pooling is always k regardless of the size of the input. As shown in Fig. 13, with the fixed ROI pooling outputs as inputs, it is possible to choose the architecture of the final classifier and regressor, resulting in the identification of the object from the background inside a refined bounding box.

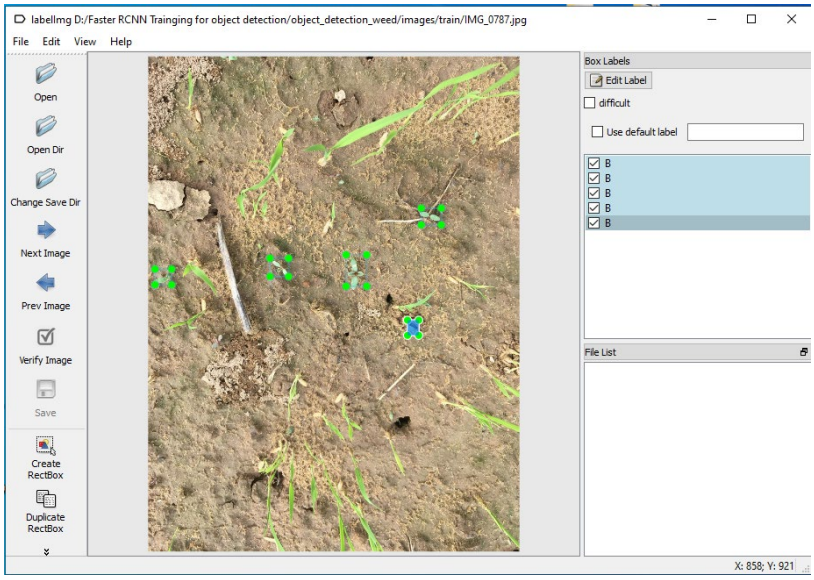

Fig. 14 LabelImg tool.

For this research application, a set of 300 images of different fields taken under uncontrolled light conditions was used as training data. The hand-made annotation for each kind of weed on each image was performed using the LabelImg (Fig. 14), which is a graphical image annotation tool written in Python. A set of 237 images with 1780 bounding boxes for broadleaf weeds and 365 bounding boxes for narrow leaf weeds was annotated for training. A set of 65 images with 619 bounding boxes for broadleaf weeds and 113 bounding boxes for narrow leaf weeds was annotated for testing. Then, all data were used for training using the TensorFlow's Object Detection API library with the Faster R-CNN-Inception-V2 model (Huang et al., 2017). In this test, the Faster R-CNN-Inception-V2 model was used while keeping all the default setting parameters and only changing the number of classes to 2, corresponding to the two main kinds of weeds. The main reason for choosing this model was the resulting higher detection rate for small weeds in comparison to other models available in the TensorFlow library. The results of the training and evaluation stages could be observed by applying TensorFlow's visualization platform, TensorBoard (TensorFlow's Visualization Toolkit, 2018). The TensorBoard ran while the model was being trained, making this tool useful for confirming that the training was

going in the right direction. In this training, the TotallLoss graph showed that the training was going in the right direction and the loss function was going from high to low. The loss function started at around 3.0 and dropped to 0.4, which took 32262 steps over about 22 hours. If the training continued, then the loss function would continue to decrease and minimize its value, which means that the accuracy of prediction would be higher. However, when the loss function is near its minimum value, the training time needed for the loss function to go down will increase. That is why the training stopped after 22 hours. When the training is finished, the program exports an inference graph which is used for inference detection. The result of the detection shown on the image is also dependent on the model score threshold selected, among other critical parameters. If the model score threshold is selected at 50%, the number of detected objects will be high. The original code used for this test was obtained from a GitHub web page (EdjeElictronic, 2019).

The image processing algorithm with the bounding blob analysis flow chart is shown on Fig. 15. Each step of the flow chart is explained in detail as follows.

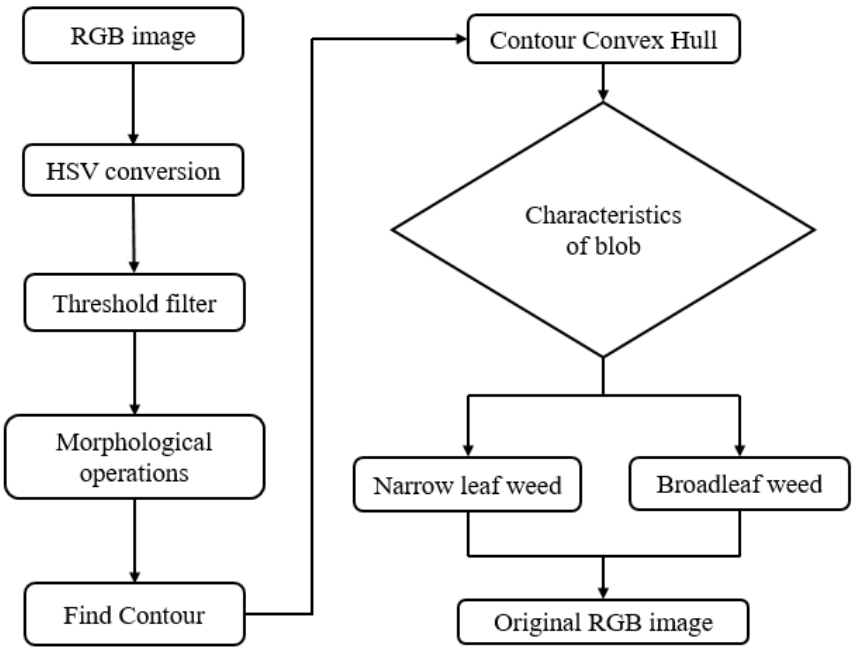

Fig. 15 Bounding blob analysis algorithm process.

The input RGB image recorded by the camera was converted into the hue, saturation and value (HSV) color space for image segmentation. The HSV color space was chosen for color filtering instead of the RGB color space because it provided a better contrast for different illumination conditions (Bora et al., 2015).

Fig. 16a shows the input image in the RGB color space, collected by using the experimental setup shown on Fig. 12. The output image in the HSV color space is shown in Fig. 16b. Note that the resulting HSV color space output image shown in Fig. 16b does not itself show information useful for recognizing weeds, plants, and soil, but it does provide the HSV values necessary to separate the vegetation from the rest of the image.

A threshold filter was used to convert the HSV color space image into a binary image, in which white pixels correspond to the vegetation (rice and weeds) and black pixels to the soil. The thresholding values of the threshold function were found by means of fine tuning. Fig. 16c shows the resulting binary image; it is evident how the plants have an overall good contrast with other elements in the RGB image such as shadows and soil. It is possible to smooth this noise by applying the morphological operations of erosion and dilation. The erosion operation eliminates small isolated white pixel areas. The dilation operation merges the areas where large groups of white pixels are found next to each other (Gonzalez et al., 2002). The erosion operation uses a rectangular structuring element of 2 x 2 pixels. The dilation operation makes white crop rows denser and eliminates breaks using a rectangular structuring element of 1 x 1 pixels. These morphological operations transform the binary image shown in Fig. 16c into the smoothed result shown in Fig. 16d.

The next step was to find contours, the convex hull of the contours, and the bounding rectangle of the contours for the smoothed image shown in Fig. 16d (G Bradski et al., 2008; Brahmbhatt, 2013a) . The “find contours” function will detect all the white regions on the image, and then

the convex hull is determined for each detected contour in order to find the smallest convex set of points that can represent each contour on the image. The step *characteristics of blob* shown in Fig. 15 refers to the calculation of the bounding rectangle of each of the contours in order to analyze the characteristics of each plant, as shown in Fig. 17. The characteristics of the bounding rectangle are: the height *h*, the width *w*, the diagonal *d*, the ratio *h/w*, the area of the bounding rectangle S_r, the area of the plant contour S_c contained inside the bounding rectangle, and the ratio S_c/S_r, which is of special interest. These characteristics help to remove the rice and remaining noise from the image. The setting values for distinguishing between narrow-leaf and broadleaf weeds are different. The ratio S_c/S_r is particularly helpful for distinguishing the kind of weed; the results are shown in Fig. 16e for broadleaf weeds and Fig. 16f for narrow-leaf weeds. Finally, the algorithm counts the number of each kind of weed and draws a bounding rectangle on the weed location of the output image shown in Fig. 16g, using yellow for broadleaf weeds and green for narrow-leaf weeds.

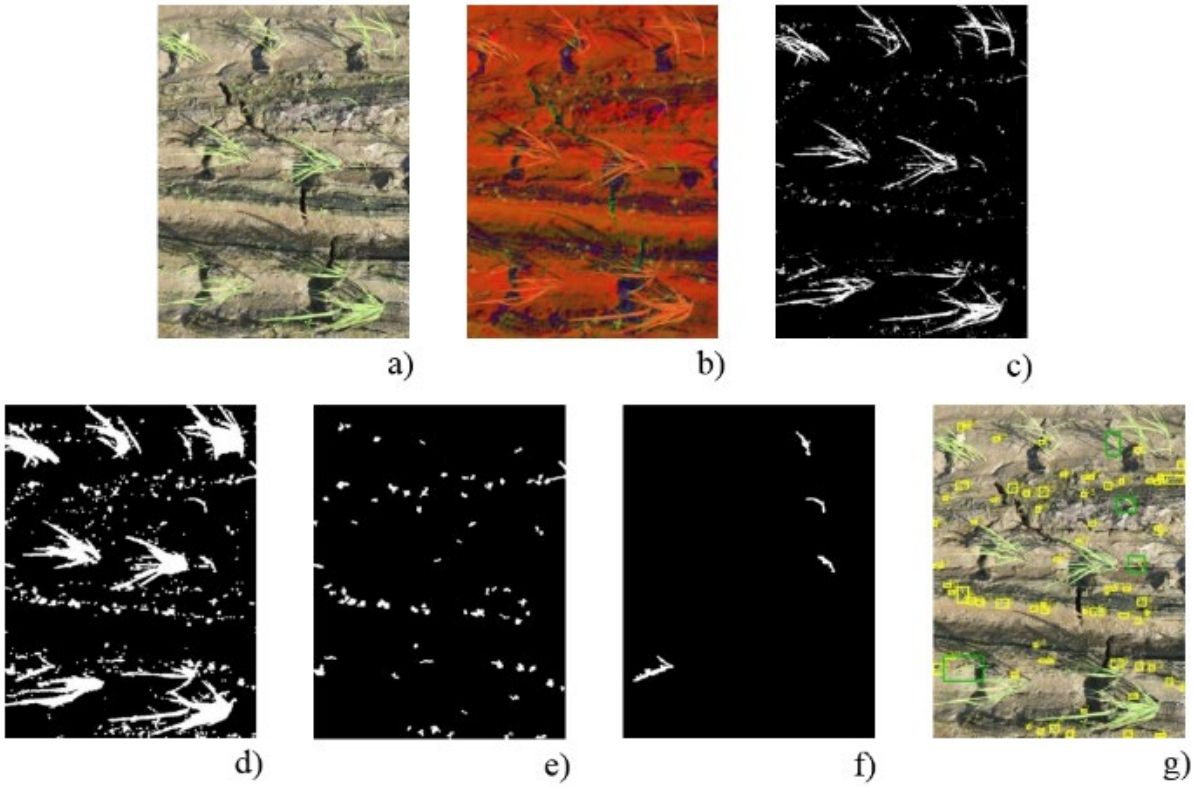

Fig. 16 Narrow leaf weed and broadleaf weed detection.

a) RGB input image. b) HSV image. c) Binary image. d) Morphological operations result.

e) Broadleaf weed detection result. f) Narrow leaf weed detection result. g) Output image.

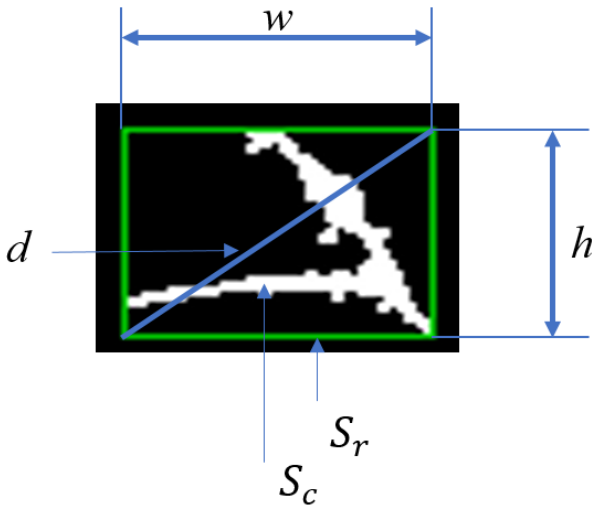

Fig. 17 Bounding rectangle characteristics for blob analysis.

2.3 Results and discussion

A set of 112 sample images was used to assess the performance of each image processing method in detecting two kinds of weeds in the rice field. For both methods, the size of the input images was reduced to 450x600 pixels because reducing the image size can help decrease the processing time needed to perform the detection. However, it is necessary to ensure that the image size reduction does not affect the program's ability to identify two kinds of weeds.

For the Faster R-CNN, the model score threshold was set at 50% for detecting the two kinds of weeds. This value is not too high, because it can increase the detection accuracy when the weeds overlap with rice. For the bounding blob method, the most important aspect is setting the characteristics values for the analysis of the bounding rectangle blob. The characteristics values were selected based on experimental measurements of the size of the rice plants, the size of two kinds of weeds, and the size of the noise in 300 images collected in Vietnam, which makes it possible to remove the noise and the rice, and also to detect the two kinds of weeds. The values $100 < S_r < 3000,\ h > 5$ and $w > 5,$ and $d > 15$ helped to remove both small white areas (noise) and large white areas (rice) in the binary picture. The characteristic value $0.1 < \frac{h}{w} < 2.5$ helped to exclude the portions of rice leaves that were separated from the rice plants during the threshold process. The last characteristic value $\frac{S_c}{S_r} > 0.3$ was used for the detection of broadleaf weeds, while the characteristic value $\frac{S_c}{S_r} < 0.3$ was used for the detection of narrow-leaf weeds. It is possible to verify that for the broadleaf weeds, the area of the contour occupies most of its bounding rectangle area, as shown in Fig. 18a, while for the narrow leaf weeds the contour area only occupies a small part of its bounding rectangle area as shown in Fig. 18b.

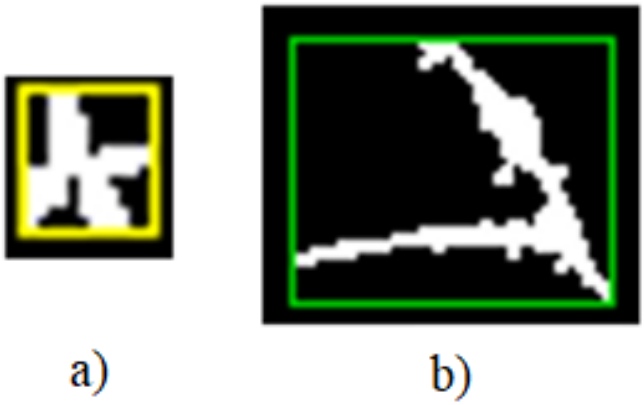

Fig. 18 Weeds characteristic difference.

a) Bounding rectangle of broadleaf weed. b) Bounding rectangle of narrow leaf weed.

Fig. 19a shows an example image used for the detection of two kinds of weeds created using the Faster R-CNN method, and Fig. 19b shows an example image used for the detection of two kinds of weeds created using the bounding blob method. The green color represents broadleaf weed detection, and the yellow color represents narrow leaf weed detection. Fig. 19 shows that for the same input images, the detection accuracies of the two methods in detecting the two kinds of weeds were different. Fig. 19a shows a higher number of weeds detected, despite the small size of the weeds; however, some weeds that overlapped with rice leaves could not be detected. Fig. 19b shows a lower number of weeds detected and shows that it was not possible to detect small weeds; however, some weeds that overlapped with rice leaves were detected. However, only one example image could not be used to estimate the detection accuracy of both image processing methods. It was necessary to estimate the accuracy of the whole set of 112 sample images.

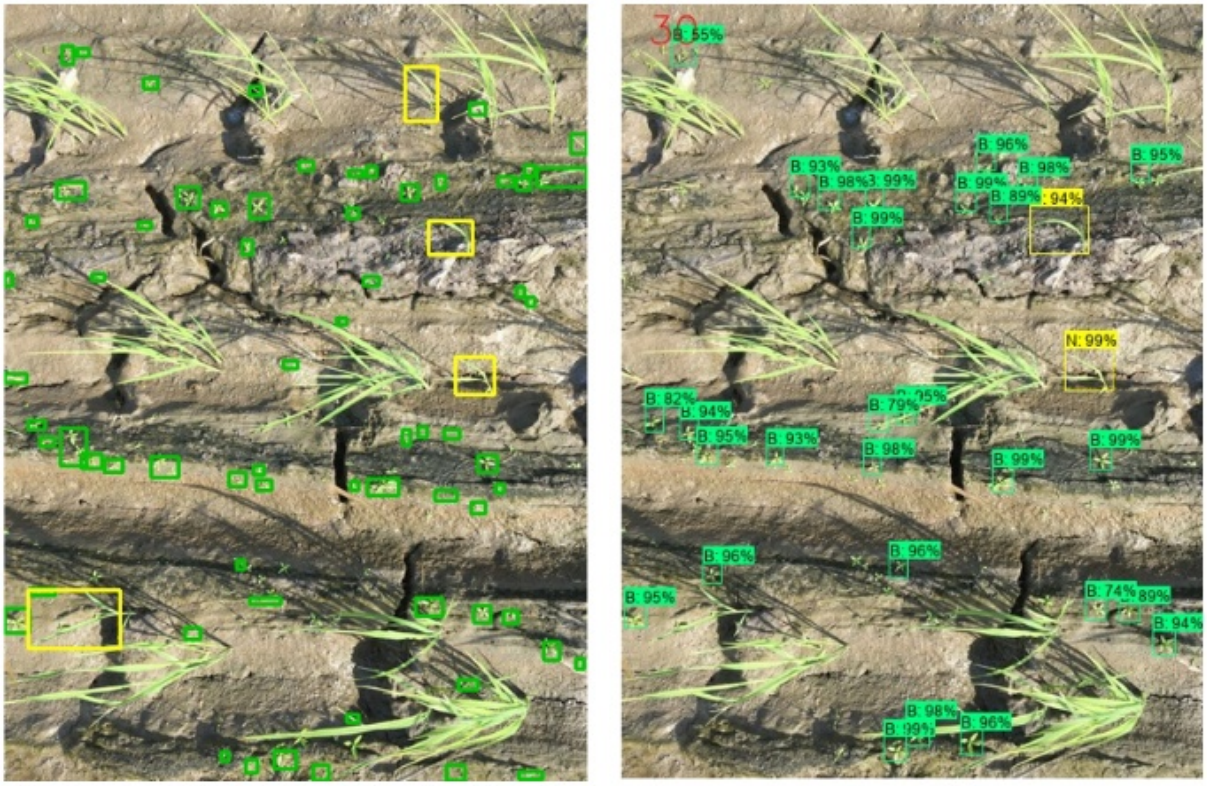

Fig. 19 Result of narrow leaf and broadleaf weed detection.

a) Bounding blob method. b) Faster R-CNN method.

Each of the 112 images were tested with both the Faster R-CNN and bounding blob methods. The test consisted of calculating the processing time that each image processing method required to identify the weeds present in one single image. In addition, the detection accuracy was calculated as the percentage of detected weeds over the actual number of the two kinds of weeds present on each of the images. The actual numbers of the two kinds of weeds were calculated for each sample picture based on an expert criterion. Finally, the average processing time and the average detection accuracy were calculated for all 112 images. The results are summarized in Table 4 .

Table 4 Faster R-CNN and Bounding blob methods detection result

Kinds of weed	Faster R-CNN detection method		Bounding blob detection method	
	Average processing time (Seconds)	Average detection accuracy (Percentage)	Average processing time (Seconds)	Average detection accuracy (Percentage)
Narrow leaf weed	1.15	40.6	0.26	87.1
Broadleaf weed	1.15	47.7	0.26	95.4

The detection results presented in Table 4 suggest that the bounding blob analysis method is more appropriate for the development of a smart sprayer system because it has a shorter image processing time. Moreover, it has an average detection accuracy greater than that of the Faster R-CNN method.

The rational explanation for these results is that, in this study, the Faster R-CNN method accuracy depended on the size of the data set used for training. The accuracy could be improved by using a bigger data set with corrections on the object proposal region, but a longer training time would be needed to get good results. However, an advantage of the Faster R-CNN method is that it can detect the object under very difficult conditions, such as weeds overlapping with rice plants and other objects. Still, under variable field conditions the accuracy will decrease. In that case, it is possible to improve the accuracy by changing to another inference graph, but this process takes a lot of time, including training time. On the other hand, the bounding blob analysis method results show a higher detection accuracy and a shorter time required for setting the HSV parameters. However, when the lighting conditions undergo major changes, the HSV filter-setting parameters need to be changed as well. Another disadvantage of the bounding blob method is that, for this research, its application depended on the appropriate selection of the development stage of the crop in order to obtain accurate weed detection rates. The highest

accuracy can be obtained when rice leaves do not cover the weeds, in particular during the post-emergence stage.

The Faster R-CNN method could be used for real-time weed detection if a faster computer with a high-performance graphics card is used to reduce the image processing time (Zhang et al., 2016). On the other hand, the bounding blob method works well without the need for high-performance hardware. Therefore, the bounding blob analysis method can be practically applied for the real-time detection of weeds present in the rice fields of the VMD and may be applied in the future development of a smart spraying machine.

2.4 Conclusion

This study has shown that the bounding blob analysis method is better than Faster R-CNN for detecting two kinds of weeds. Both methods can detect two kinds of weeds with different levels of accuracy and different processing times. However, bounding blob analysis has the advantage of high accuracy and a low processing time. Based on this result, the bounding blob method should be selected for the detection of weeds in rice fields. The goals for future work include the development of a smart sprayer based on the bounding blob method for weed detection and involving a set of cameras and a set of spraying nozzles.

Chapter 3 Real-time of detection leaf blast and bacterial blight diseases

This chapter introduces an image processing method capable of performing real-time detection of two common diseases, leaf blast (LB) disease and bacterial blight (BB) disease, in the paddy fields of the Vietnamese Mekong Delta (VMD). The input images were recorded with an RGB camera. The discrimination of the diseases on rice leaves was obtained by an image processing method based on the extraction of texture and color features from disease lesions, in conjunction with either the Gaussian Naïve Bayes classifier or the K-Nearest Neighbors (KNN) algorithm, to classify the disease into various categories. Both methods perform real-time detection of LB and BB disease in the early stages of development with uncontrolled light conditions in rice fields. Our results show that Gaussian Naïve Bayes is simple but effective, with a shorter processing time and higher detection accuracy than KNN. The result of this method is ideal for practical application of a smart sprayer system, which can use small amounts of pesticides by only spraying in diseases areas (spot spray).

3.1 Introduction

The Vietnamese Mekong Delta (VMD) is the main rice-producing region in Vietnam, and is critical to both food security and rice exports. Every year, the VMD contributes more than 90% of Vietnam's exported rice, and it accounted for approximately 60% of the country's rice area and production in 2014 (Nguyen, 2017) . However, to ensure productivity and rice yield, the farmers in the VMD try to increase the number of crops per year and increase the amount of fertilizers and pesticides used, which seriously affects the environment in this area. An overview of the agriculture pollution in Vietnam (Nguyen, 2017) reported that every year some 1,790 active ingredients (ai) tons of molluscicides, 210 ai tons of herbicides, 1,224 ai tons of insecticides, and 4,245 ai tons fungicides are wasted from excessive or unnecessary use in rice production in the VMD. These chemicals are directly and indirectly cause air, water, and soil

pollution in addition to human health problems. The use of these chemicals also increases the production costs and reduces the quality of rice products from Vietnam.

In rice cultivation, the majority of pesticides are used focusing in three main problems: herbicides for weed management, fungicide for disease management and insecticide for pest management. The Food and Agricultural Organization reports ratios of pesticide application in rice fields in Vietnam on 2002 of 25.3% herbicides, 32.6% fungicides, and 40.3% insecticides (FAO, 2005). Fungal leaf blast disease and bacterial leaf blight disease are common and well-known diseases found in the rice fields of Vietnam.

A disease is an abnormal condition that injures the plant or causes it to function improperly. Diseases are readily recognized by their symptoms – associated visible changes in the plant. The organisms that cause diseases are known as pathogens. Many species of bacteria, fungus, nematode, virus and mycoplasma-like organisms cause diseases in rice. Disorders or abnormalities may also be caused by abiotic factors such as low or high temperature beyond the limits for normal growth of rice, deficiency or excess of nutrients in the soil and water, pH and other soil conditions which effect the availability and uptake of nutrients, toxic substances such as H_2S produced in the soil, water stress and reduced light (Francisco & Zahirul, 2003).

The rice blast *Pyricularia Oryzae* cause a fungal disease common in the rice field (Francisco & Zahirul, 2003). Depending on the site of symptom, rice blast is referred to as leaf blast, collar blast, node blast and neck blast. In the leaf blast on early stage (Fig. 20), the lesions on the leaf blade are elliptical or spindle shaped with brown borders and gray centers. Under favorable conditions, lesions enlarge killing the leaves. Collar blast occurs when the pathogen infects the collar, which can kill the entire leaf blade. The pathogen also infects the node of the stem, which turns blackish and breaks easily; this condition is called node blast. Finally, for the neck blast the neck of the panicle can also be infected.

Fig. 20 Leaf blast disease on early stage.

The bacterium *Xanthomonas oryzae* cause a bacterial disease (Francisco & Zahirul, 2003) characterized by a water-soaked lesion that usually starting at leaf margins, a few centimeters alway from the tip, and spreads towards the leaf base, and become yellowish to light brown due to drying; with yellowish border between dead and green areas of the leaf (Fig. 21). It is usually observed at maximum tillering stage and onwards. In severely diseased fields gains may also be infected. In the tropic infection may also cause withering of leaves or entire young plants (refer as kresek) and production of pale-yellow leaves at a later stage of the growth.

Fig. 21 Leaf scald disease on early stage.

Several studies have reported that LB and BB are the most harmful rice diseases and have caused yield losses. For example, rice disease resulted in a yield reduction of 1-10% from 456 farmer's fields surveyed across tropical Asia on during 1987-1997 (Savary et al., 2000), and rice yield lost ranging from 50% to 85% have been reported in the Philippines (IRRI, 2020).

In Vietnam, grain yield losses of 38.21% to 64.57% due to the neck blast disease have been reported (Hai et al., 2007).

Traditionally, the LB and the BB disease detection and application of fungicide are performed by human inspectors. The farmers decide to spray the whole field even through the disease appears randomly in a few areas in the field. The large amounts of chemicals used affect the environment and are costly for the farmer. Studies (Chau et al., 2015; Toan et al., 2013) reported that all investigated water sources in the VMD have been shown to be contaminated by pesticides, however, local population in rural areas still use all available water sources for their daily needs, including drinking. Hence, the current of the pesticides under different conditions needs to be investigated in detail and it should be priority to prevent pollution. There are several options to reduce the pesticide residue in the water resources, including the use cheap material such as bamboo (Thuy et al., 2012). However, a more sustainable solution and the best way to prevent pollution is to reduce the amount of pesticides introduced to the environment from agriculture activities.

Thus, plant protection focusing on managing diseases and controlling the amount of fungicides to be applied has been an important part of research over the last few years. The literature includes many reports on the detection of rice diseases. (Archana et al., 2018) report on the prediction of early symptoms of bacterial blight and brown spots on rice plants by separating leaf color, signs and illumination from different color channels. This algorithm made it easy perform final feature analyses, however, it cannot predict diseases with symptoms of similar colors. (Bakar et al., 2018) describe an integrated method for detection of a disease using three categories: infection stage, spreading stage and worst stage. This is possible by analyzing the Hue, Saturation and Value color spaces with multi-level thresholding, and identifying classified regions of interest during image segmentation. This technique successfully detects the disease based on images taken in uncontrolled environments, however, it is not suitable for

the detection of other diseases with similar features. In another study, (Islam et al., 2018) present the Gaussian Naïve Bayes method to classify the disease based on the percentage of RGB values of the affected portion using image processing. This method has successfully detected three rice diseases, namely brown spot, rice bacterial blight, and rice blast. This method has successfully detected three rice diseases, brown spot, rice bacterial blight, and rice blast, and has a fast processing time and high accuracy, however, it cannot detect a disease with similar color features but a different shape.

Some recent research shows robustness to detect many kinds of diseases on rice leaves by using deep learning CNN algorithms (Lu et al., 2017; Mique et al., 2018). These algorithms show high accuracy, however, their application and testing are limited to an individual leaf, and the processing time is not good for real-time application. Thus, current research application for rice disease detection only focus on the development of a tool to help humans to evaluate diseases. To solve these problems, this study used an algorithm based on the mini-bounding rectangle blob as a shape feature, and the mean values of three color channels as the color features for both Red, Green and Blue (RGB) color spaces and Hue, Saturation and Intensity (HSI) color spaces. Those features were used by the Gaussian Naïve Bayes classifier and the K-Nearest Neighbors (KNN) algorithm for real-time detection of the two dataset training diseases, LB and BB, which are native to the rice fields of the VMD. In addition, the processing time and accuracy of each method were estimated as the primary parameters for selecting the method to be used in the development of a smart sprayer for rice fields.

3.2 Materials and methods

Rice disease is always a concern for every farmer in the VMD, where the weather is favorable for the proliferation of insects and diseases in the crops with high temperatures and humidity, a large annual rainfall, and abrupt temperature changes between day and night. Fungal diseases such as rice blast and bacterial diseases as bacterial blight usually appear at the end of the

tillering, panicle formation and flowering stages. During those stages, the high density of leaves covering each other increases humidity, creating favorable conditions for disease development. The development of the rice blast and bacterial blight diseases can be divided into three stages:

(*i*) the early stage of the disease, in which small lesions appear on the leaves;

(*ii*) the disease spreads into the body and neck of the flower; and

(*iii*) the disease spreads widely, surrounding the leaves and killing the rice.

Therefore, farmers must frequently check their fields to detect the early stages of disease and to begin spraying fungicides. When disease reaches the second or third stage, it requires a high amount of fungicides, polluting the environment, however, at this point, the rice plant cannot be recovered, and rice yield is seriously reduced.

The present research addresses early stage disease detection. Images were collected during the early stage of disease from several places in the VMD, including Dinh Thanh – An Giang, Co Do – Can Tho, and Chau Thanh – Tra Vinh. A normal RGB camera was used to capture images of the rice fields under uncontrolled illumination conditions such as mornings and afternoons on different days. All input images were stored in a computer and then used for training and testing the image processing detection of LB and BB. The output data can be used by agriculture experts to take further action.

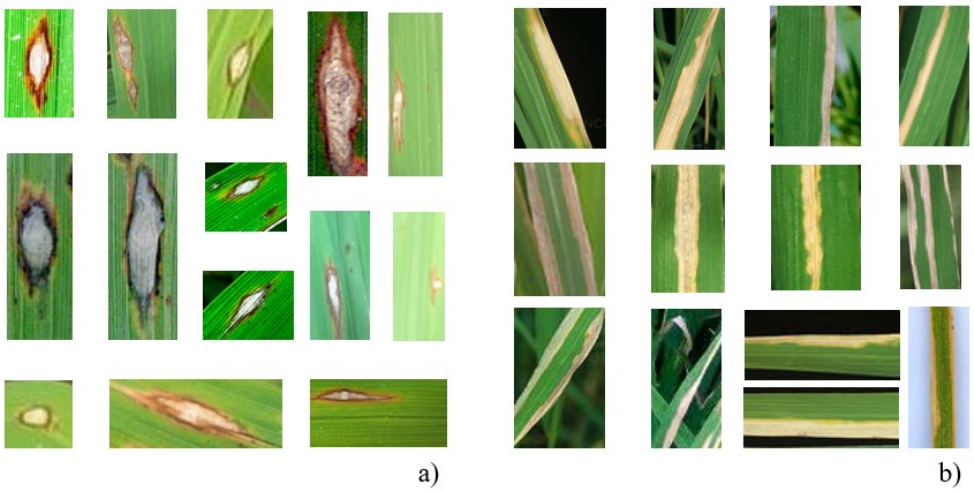

Fig. 22 Example of dataset training images.

a) LB dataset training. b) BB dataset training.

The dataset images of the two diseases used for training cover a single lesion on the leaf (Fig. 22). Through image processing techniques such as background subtraction, finding the contours and application of the masking method, it is possible to extract the basic characteristics, including the average value of each color channel (RGB) and the ratio between height and width of the minimum rectangle bounding blob. The transformation of RGB color space to HSI color space (Nnolim, 2015) can be derived using Equation (1) to (6). All features values of each image were used to calculate the parameters for each feature required by the classifier based on the Gaussian Naïve Bayes and the KNN algorithm. Unlike the training images, the test images include many disease lesions of different size, growth stage of rice and uncontrolled light conditions to estimate the applicability of the program.

$$r = \frac{R}{R+G+B}\ ,\ g = \frac{G}{R+G+B},\ b = \frac{G}{R+G+B} \tag{1}$$

$h \in [0, \pi]$ for b ≤ g

$$h = \cos^{-1}\left\{\frac{0.5[(r-g)+(r-b)]}{[(r-g)^2 + (r-b)(g-b)]^{1/2}}\right\} \tag{2}$$

$h \in [\pi, 2\pi]$ for b > g

$$h = 2\pi - \cos^{-1}\left\{\frac{0.5[(r-g)+(r-b)]}{[(r-g)^2 + (r-b)(g-b)]^{1/2}}\right\} \quad (3)$$

$$s = 1 - MIN(r, g, b) \quad (4)$$

$$i = \frac{R+G+B}{3*255} \quad (5)$$

H = h*180/π, S = s * 100, I = i *255 (6)

Where:

R Red channel color value

G Green channel color value

B Blue channel color value

Fig. 23 shown a description of feature extraction from disease lesion by image processing. Single disease lesion RGB image was threshold to remove background (healthy leaf color), masking of blue pixels to calculated R, G and B mean value, applying minimum rectangle bounding blob on the contour and calculated the ratio between the width to height of rectangle. From R, G and B mean value was transfer to H, S and I value by Eq. (1) to Eq. (6). Those value used for classifying kind of diseases on detection program.

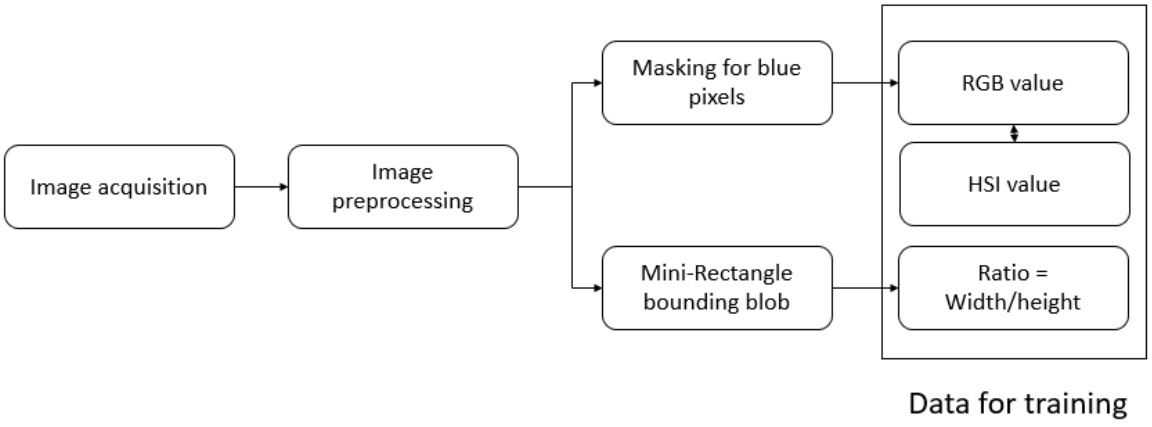

Fig. 23 Preparing data set for training.

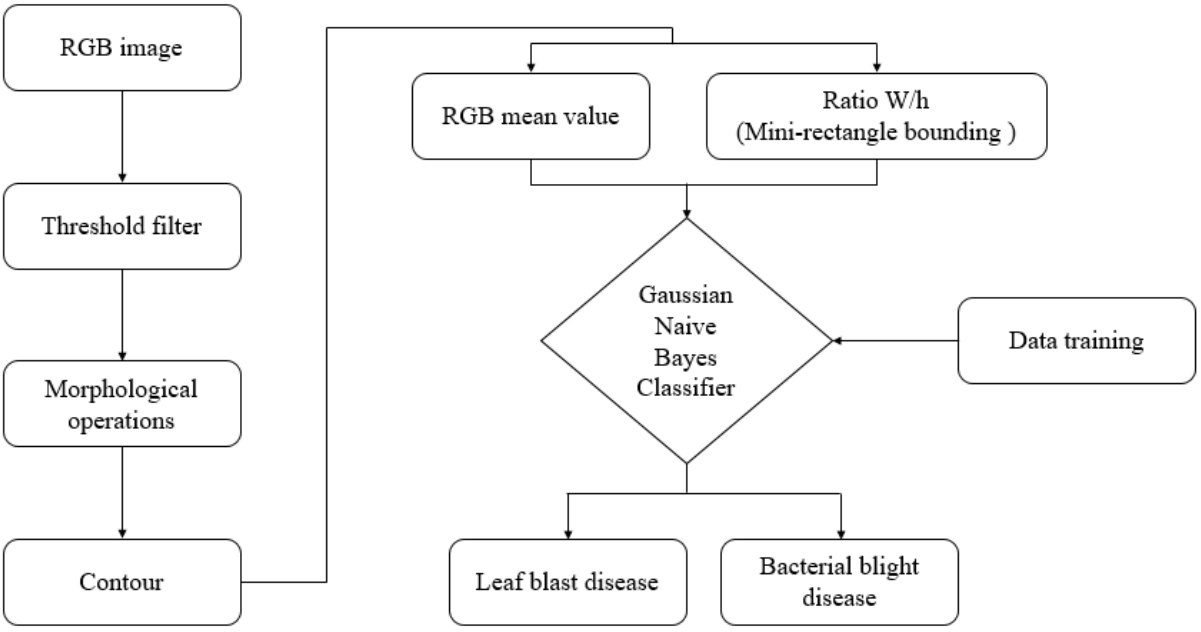

Fig. 24 Algorithm of LB and BB disease detection with RGB color space.

Fig. 24 shown image processing algorithm for detection of the two kinds of diseases using Gaussian Naïve Bayes classification algorithm from the RGB color space and shape is shown in Fig. 25. The Gaussian Naïve Bayes classifier is a simple probabilistic classifier based on applying Bayes' theorem. Gaussian Naïve Bayes considers each and every feature variable as an independent variable. This classifier can be trained very efficiently in supervised learning and requires only a small amount of training data that are necessary for classification. The input image in RGB color space collected with the RGB camera shown in Fig. 25a was resized to fixed resolution to improve the memory storage capacity and to reduce the computational complexity. The resizing will reduce the resolution (450 x 600 pixels) to improve the memory storage capacity and to reduce computational time. A threshold filter was used to convert the RGB image into a binary image in which the white pixels correspond to disease and the black pixels to a healthy rice leaf. Fig. 25b shows the resulting binary image; it still has noise formed from the motion between the camera and the object, improper shutter opening, atmospheric disturbances and misfocusing (Archana et al., 2014). This noise was smoothed by applying the

morphological operation of erosion and dilation. The erosion operation eliminates small isolated white pixel areas. The dilation operation merges the areas where large groups of white pixels are found next to each other (R.C. Gonzalez et al., 2002). The erosion operation uses a rectangular shape structuring element of 2 x 2 pixels. The dilation operation makes the white areas denser and eliminates breaks using a rectangular shape structuring element of 1 x 1 pixels. These morphological operations transformed the binary image shown in Fig. 25b into the smoothed result shown in Fig. 25c.

The next step is to find contours from the image shown in Fig. 25c (G. Bradski et al., 2008; Brahmbhatt, 2013b). The contours produced the characteristics of the bounding blob, namely: the height *h*, the width *w*, the area of the minimum rectangle bounding S_r and the ratio *w/h*. The resulting ratios are shown in Fig. 25d. Parallel to finding characteristics of the bounding blob, the subtraction of the background from the original RGB image takes place based on the contour; all the background outside of the contour was removed using a masking method. It was then possible to calculate the RGB mean values inside each contour. The mean values of the three channels are shown in Fig. 25e. Finally, the classifier used was based on the Gaussian Naïve Bayes classifier (Mitchell, 1997) described by Equation (7) to (11) with the training dataset in the RGB. The average of each feature given by Eq. (7) and the variance given by Eq. (8) were calculated from the dataset for training and were then applied to Eq. (9) to calculate the likelihood of each feature. Equation (9) was applied to each contour in the image with red mean value R, green mean value G, blue mean value B and ratio K. Equation (10) is the prediction value for the blast disease and Eq. (11) is the prediction value for the blight disease.

$$\bar{a} = \frac{1}{n}\sum_{i=1}^{n} x_i \tag{7}$$

$$var = \frac{1}{n-1}\sum_{i=1}^{n}(a_i - \bar{a})^2 \quad (8)$$

$$p(Red|R) = \frac{1}{\sqrt{2.\pi.var_r}} e^{-\frac{(R-\overline{a_r})^2}{2.var_r}}$$
$$p(Green|G) = \frac{1}{\sqrt{2.\pi.var_g}} e^{-\frac{(G-\overline{a_g})^2}{2.var_g}} \quad (9)$$
$$p(Blue|B) = \frac{1}{\sqrt{2.\pi.var_b}} e^{-\frac{(B-\overline{a_b})^2}{2.var_b}}$$
$$p(Ratio|K) = \frac{1}{\sqrt{2.\pi.var_k}} e^{-\frac{(K-\overline{a_k})^2}{2.var_k}}$$

$$Posterior(Blast) = p(Red|R) * p(Green|G) * p(Blue|B) * p(Ratio|K) \quad (10)$$

$$Posterior(Blight) = p(Red|R) * p(Green|G) * p(Blue|B) * p(Ratio|K) \quad (11)$$

Where:

$\bar{a}$	Average value of each feature
var	Variance value of each feature
R	Red channel color mean value
G	Green channel color mean value
B	Blue channel color mean value
K	Bounding rectangle width to height ratio K = w/h

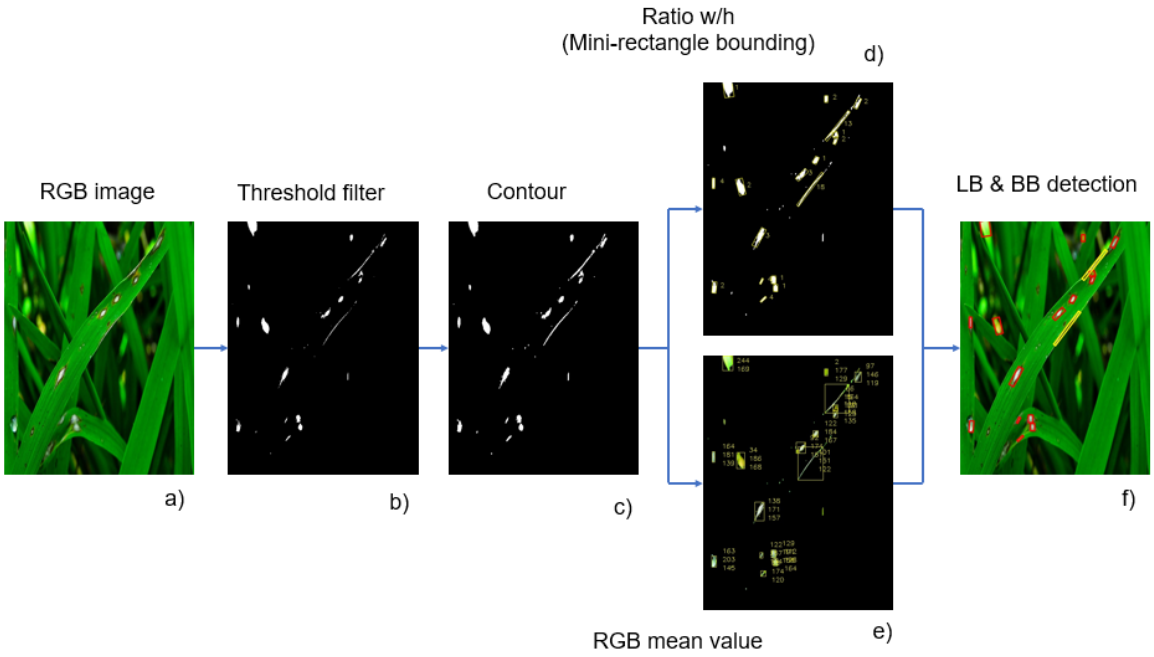

Fig. 25 Detection of LB and BB on rice leaves using the Gaussian Naïve Bayes classifier for RGB color spaces.

a) RGB input image. b) Threshold image. c) Contour image. d) Minimum rectangle bounding image. e) RGB mean value image. f) Output image.

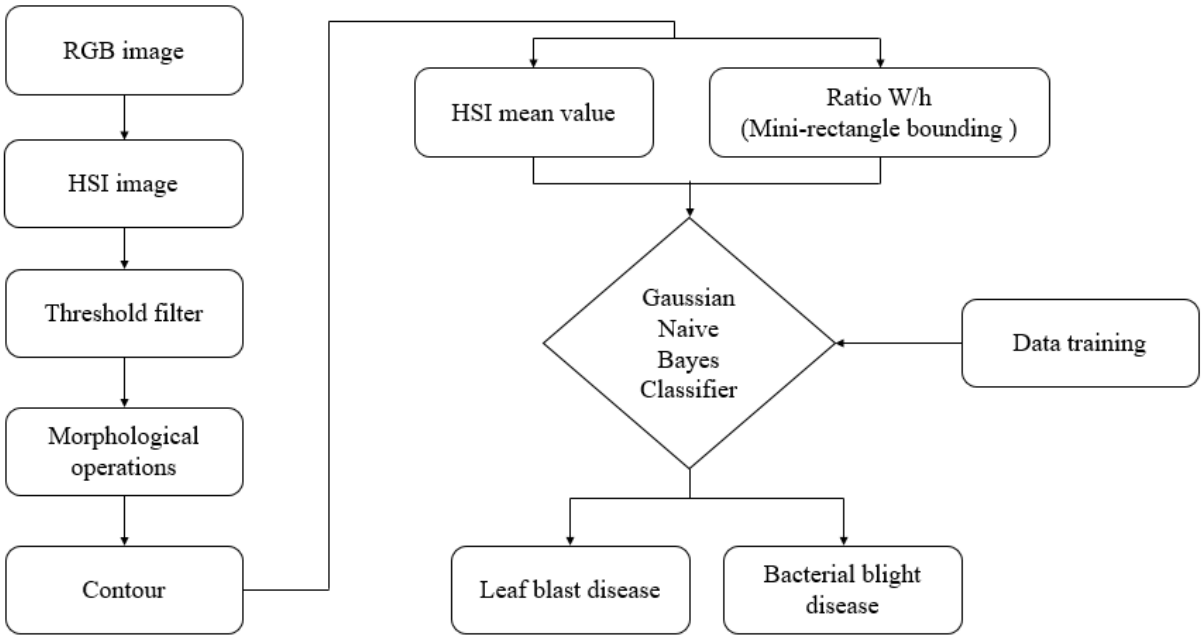

Fig. 26 Algorithm of LB and BB disease detection with HSI color space.

The image processing algorithm for the detection of the two kinds of diseases by the Gaussian Naïve Bayes classification algorithm from the HSI color space and shape is shown in Fig. 26 by flowchart and Fig. 27 by images. Similar to the method used in Fig. 25, the input image in the RGB color space shown in Fig. 27a was resized to a fixed resolution (450 x 600 pixels) to improve memory storage capacity and reduce computational time. The transformation from the RGB to the HSI color space was obtained by using equation (1) to (6); the result of the transformation is shown in Fig. 27b. A threshold filter is used to convert the HSI image into a binary image. Fig. 27c shows the resulting binary image. After applying the morphological operations of erosion and dilation, it was possible to find the contours from the image shown in Fig. 27d.

The contours produced the characteristics of the bounding blob; h, w, S_r and w/h. The resulting ratios are shown in Fig. 27e. The background in the HSI image was subtracted by using a masking method, and the HSI mean values were then calculated inside each contour. The mean values of the three channels are shown in Fig. 27f. Finally, the Gaussian Naïve Bayes classifier

was used with the dataset training in the HSI color space. The result is shown in Fig. 27g.

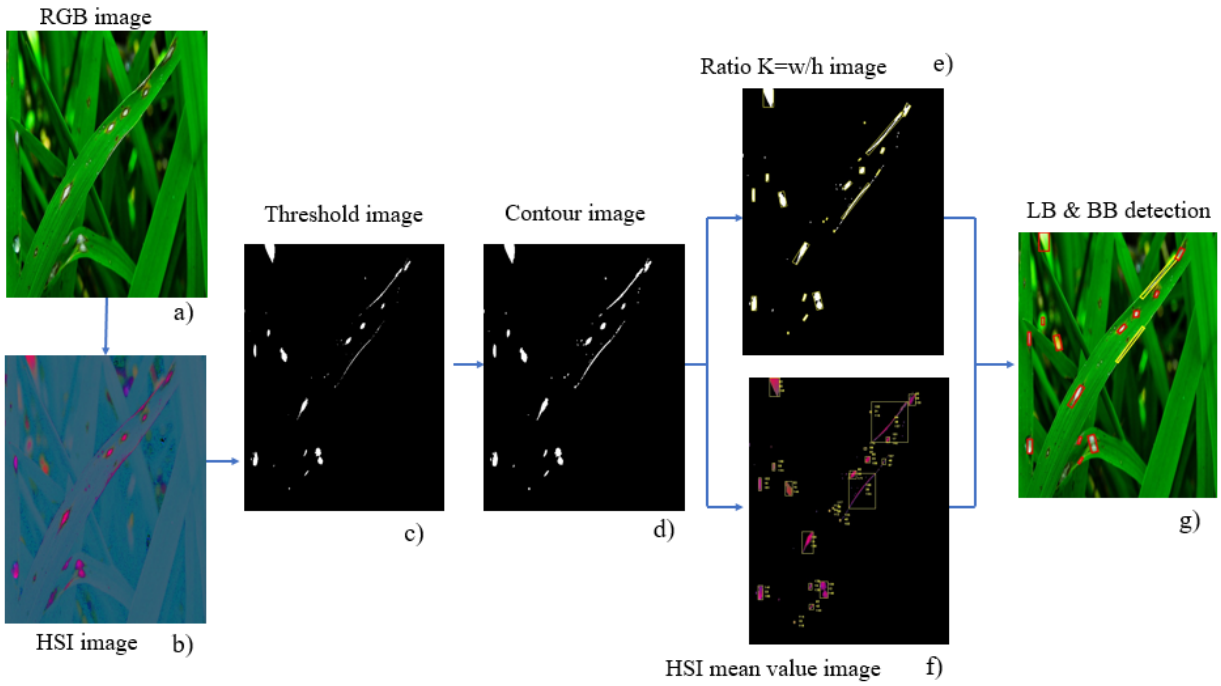

Fig. 27 Detection of LB and BB disease on rice leaves using Gaussian Naïve Bayes classifier from HSI color space.

a) RGB input image. b) HSI image. c) Threshold image. d) Contour image.

e) Minimum rectangle bounding image. f) HSI mean value image. g) Output image.

Fig. 28 shows an explanation of the feature extraction method. Fig. 28a shows a detail of the minimum rectangle bounding blob analysis from Fig. 25d and Fig. 27e, which is a calculation of the ratio *w/h* as feature of texture and the area Sr as a characteristic used to filter the noise. Fig. 28b illustrated how to extract the three RGB colors mean value (average value) from a single disease lesion by using the masking method shown in Fig. 25e. And, Fig. 28c illustrated how to extract the three HSI from a single lesion using the masking method shown in Fig. 27f. In each disease lesion corrected from the contour, the masking method was applied to remove the background and keep the color inside the contour only, then the rectangle bounding function was used to crop each single lesion disease into small images. This helped to reduce the

processing time to calculate the average value for each color channel inside the contour. Eq. (12) and Eq. (13) explained how to obtain the mean value for each color channel. The mean (average) value of each color channel could be calculated by the sum of the pixels in a single-color channel divided by the sum of pixels (not including pixels of value zero) inside the rectangle bounding the contour.

$$N = \sum_{I:\, mask(I) \neq 0} 1 \tag{12}$$

$$M_c = \left(\sum_{I:\, mask\ (I) \neq 0} mtx\ (I)_c \right) / N \tag{13}$$

Where:

N The total number of pixels (not including the zero-value pixels) inside the rectangle bounding the contour.

M_c Mean value of c channel.

$(I)_c$ number of pixels in a single-color c channel.

mtx The source array; it should have 1 to 4 channels (so that the result can be stored in Scalar()).

mask The optional operation mask

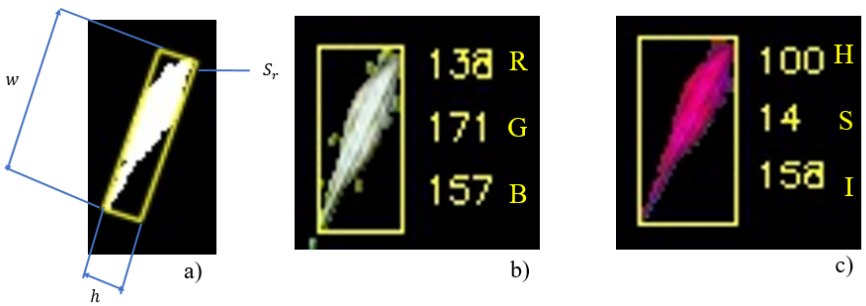

Fig. 28 Feature subtraction.

a) Minimum bounding analysis. b) RGB mean value analysis. c) HSI mean values analysis

It was also possible to perform the same image processing for diseases detection on both RGB and HSI color spaces with a dataset for training and a dataset for testing, but modifying the final step of the method to replace the Gaussian Naïve Bayes classifier step with the KNN classifier. The KNN is one of the statistical classification algorithms used for classifying based on the closest training examples in the feature space (Cover et al., 1967). It is a sample learning algorithm in which the KNN is approximated locally and all computations are deferred until classification. No learning is performed during the training step, although a training dataset is required. The training data is needed during the testing step. When an instance whose class is unknow is presented for evaluation, the algorithm computes its K-nearest neighbors, and the class is assigned by voting among those neighbors. This is why the training step is very fast for the KNN algorithm, while the testing step is costly in terms of both time and memory.

The KNN algorithm consists of two steps: a training step and a testing step. In the training step, the training examples were vectors (each with a class label) in a multidimensional feature space. In this step, the feature vectors and the class labels of the training samples were stored. In the testing step, k was a user-defined constant, and a test point was classified by assigning a label, which was the most recurrent among the k training samples nearest to that query point. In other words, the KNN method compared query points based on their distance to points in the training dataset. This is a simple yet effective way of classifying new points.

The KNN method of classifying objects requires only two parameters to tune, k and the distance metric, to achieve sufficiently high classification accuracy. Thus, in KNN-based implementations, it is critical to find the best choice of k and the distance metric to compute the nearest. Generally, larger values of k reduced the effect of noise but made boundaries between classes less distinct. The special case in which the class is predicted to be the class of

the closest training sample (i.e., when k =1) is called the nearest neighbor algorithm. In the present study, the different tested values of k were 1, 2, 3, 4, 5, 6, 7, 8, 9 and 10, and the distance metrics were the Euclidean distances. A brief explanation of the Euclidean distance metric is described by Eqs. (14) to (17) as follows.

$$r_t = \frac{R_t - minR}{maxR - minR},\ g_t = \frac{G_t - minG}{maxG - minG},\quad b_t = \frac{B_t - minB}{maxB - minB},\ k_t = \frac{K_t - minK}{maxK - minK} \tag{14}$$

$$r_{tr} = \frac{R_{tr} - minR}{maxR - minR},\ g_{tr} = \frac{G_{tr} - minG}{maxG - minG},\quad b_{tr} = \frac{B_{tr} - minB}{maxB - minB},\ k_t = \frac{K_{tr} - minK}{maxK - minK} \tag{15}$$

$$Distance\ (color) = \sqrt{(r_{tr} - r_t)^2 + (g_{tr} - g_t)^2 + (b_{tr} - b_t)^2} \tag{16}$$

$$Distance\ (color - shape) = \sqrt{(r_{tr} - r_t)^2 + (g_{tr} - g_t)^2 + (b_{tr} - b_t)^2 + (k_{tr} - k_t)^2} \tag{17}$$

Where:

r_t, g_t, b_t, k_t	temporary values of red, green, blue and ratio of each testing dataset
$r_{tr}, g_{tr}, b_{tr}, k_{tr}$	temporary values of red, green, blue and ratio of each training dataset
minR, minG, minB, minK	minimum values of red, green, blue and ratio of training dataset
maxR, maxG, maxB, maxK	maximum values of red, green, blue and ratio of training dataset
$R_{tr}, G_{tr}, B_{tr}, K_{tr}$	features values of red, green, blue and ratio of each training dataset
R_t, G_t, B_t, K_t	features values of red, green, blue and ratio of each testing dataset

The minimum and maximum values of each feature in the training dataset were applied into Eqs. (14) and (15) to calculate temporary values, namely: r_t, g_t, b_t, k_t, r_{tr}, g_{tr}, b_{tr} and k_{tr}. These values were then applied into Eq. (16) to calculate the distance by only using the color

feature; whereas Eq. (17) uses both color and shape features. In each testing component, the distance was calculated for all the components in the training data, and the assignment for each class which has the shortest distance then takes place.

3.3 Results and discussion

In the present research, a total of 116 images were used for training: 58 depicting blast diseases and 58 depicting bacterial blight diseases. The training images were carefully selected, taking different illumination, different lesion sizes and different growth stages of the rice into consideration. A set of 25 images (including a total of 110 single-lesion diseases) was used for detection and accuracy evaluation. For the background subtraction with the RGB color space method, both the green and blue channels can be used to remove the healthy leaves by a threshold filter method. However, during the experiments it became evident that the blue channel had a bigger effect in the threshold filter method because no rice disease turned green leaf image pixels blue. Under the HSI color space method, the background was removed by an intensity channel threshold filter, and for the contour detection, an additional filtering operation with a contour bounding size of $S_r > 50$ pixels helped to remove small white areas (noise) in the binary image. In the final step, the classification was applied to assign each contour to a disease class.

Table 5 Results of Gaussian Naïve Bayes classifier with RGB color space.

	Color feature (RGB)	Shape feature (K)	Color and shape features (RGBK)
Average detection accuracy (%)	82.7	78.2	90
Average processing time per image (seconds)	0.23	0.21	0.24

Table 6 Result of Gaussian Naïve Bayes classifier with HSI color space.

	Color feature (HSI)	Shape feature (K)	Color and shape features

			(HSIK)
Average detection accuracy (%)	80.0	78.2	83.6
Average processing time per image (seconds)	0.23	0.21	0.24

Table 3 and Table 4 show the results for detection accuracy and processing time when using the Gaussian Naïve Bayes classifier; Table 3 refers to results using the RGB color space and Table 4 refers to results using the HSI color space. In each color space, the accuracy and processing time were calculated with different features applied to the Gaussian Naïve Bayes equation. In this study, we separated the features in three ways: using the color feature (*R, G, B*) only, using the shape feature (*K*) only, and using both color and shape features (*R, G, B, K*) combined. Our results show that detection accuracy was increased when the color and shape features were combined, and the RGB color space yielded better detection accuracy than the HSI color space. Increasing the number of features for the classifier also increased the processing time slightly (by only 0.01 seconds); this could be acceptable to achieve a higher accuracy criterion.

Table 7 Results of KNN classifier with RGB and HSI color spaces.

	k = 1	k = 2	k = 3	k = 4	k = 5	k = 6	k = 7	k = 8	k = 9	k = 10
RGB (%)	77.27	85.45	77.27	79.09	79.09	77.27	78.18	76.36	77.27	78.18
RGBK (%)	80.0	80.0	80.0	81.82	81.82	81.82	80.91	80.0	80.91	80.91
HSI (%)	74.54	72.72	72.27	75.45	76.36	73.63	73.63	72.72	71.82	72.72
HSIK (%)	80.0	80.91	80.91	80.91	80.91	81.82	81.82	81.82	80.0	80.0

Table 5 shows the results when using the KNN classifier, summarizing the detection accuracy with different *k* values (from 1 to 10) for the color feature only, and for the color and shape features using both the RGB and HSI color spaces. Similar to the Gaussian Naïve Bayes

classifier, the KNN classifier also increased detection accuracy when combining the color feature (RGB or HSI) and the shape feature.

Table 8 Comparison between Gaussian Naïve Bayes and KNN.

	Gaussian Naïve Bayes	KNN
RGBK Average detection accuracy (%)	90.0%	80.8%
HSIK Average detection accuracy (%)	83.6%	80.9%
Processing time (seconds)	0.24s	0.26s

Table 9 Comparison processing times between Gaussian Naïve Bayes and KNN when increasing training dataset.

	Training dataset: 116	Training dataset: 232
Gaussian Naïve Bayes method Training and testing processing time (seconds) Testing dataset: 110	0.24s	0.28s
KNN method Training and testing processing time (seconds) Testing dataset: 110	0.26s	0.34s

The detection results presented in Table 6 suggest that the Gaussian Naïve Bayes classifier method using both color and shape features (RGBK) was more appropriate for the development of a smart sprayer system because it had a shorter image processing time. Moreover, it had an average detection accuracy (90%) greater than that of the KNN classifier method (80.8%). The rational explanation for these results is that, in the present study, the accuracy of both methods depended on the size of the dataset used for training. Accuracy could be improved by using a bigger dataset with a large variance in the illumination conditions, but this also resulted in longer training and detection times, as shown in Table 7. For the KNN method algorithm in particular, which calculated the distance with each component in the training dataset, the

processing time becomes longer and the method then becomes harder to use for real-time detection applications. The image processing time for individual images using the Gaussian Naïve Bayes classifier was 0.24 seconds, which makes it possible to apply this method for the real-time detection of diseases and spraying of fungicides according to the speed of a machine working in rice fields under the same conditions as transplanting (Sato et al., 1996). However, when the lighting conditions changed significantly, the B (blue) filter setting needed to be changed as well. Another disadvantage of the Gaussian Naïve Bayes method is that, in the present study, accurate disease detection depended on the method being applied during the early stages of disease symptoms. The highest accuracy was obtained when disease lesions were not covered by leaves and the lesions did not blend.

Fig. 29 shows two examples of the present experimental results of disease detection by using Gaussian Naïve Bayes method. The detected LB disease is shown in red color and the detected BB in yellow color. The disease detection shown in Fig. 29 corresponds to images captured under uncontrolled conditions: multiple leaves, different sizes, different stages of growth, orientations, light conditions and complex background. Fig. 29a shows the fungal leaf blast disease on the tillering stage of the rice plant, while Fig. 29b shows the bacterial blight disease on the flowering stage of the rice plant. Almost all the disease lesions were detected successfully and classified correctly according to each kind of disease. However, some disease lesions could not be detected successfully. This problem was caused by the background subtraction, which failed to isolate all the disease lesions and show them completely.

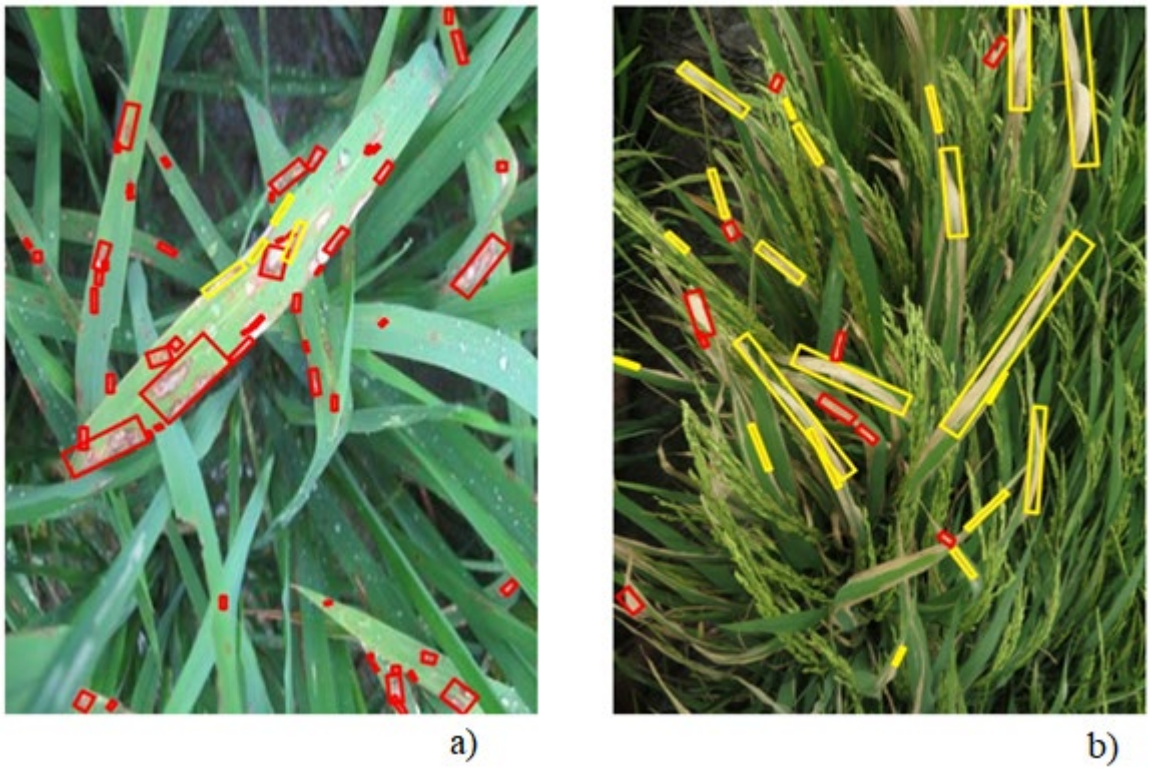

Fig. 29 LB and BB disease detection result.

a) LB disease on tillering stage. b) BB disease on flowering stage.

Fig. 30 shows two examples of the present experimental results of disease detection by using KNN method. Although the same input image with example in Fig. 29, the detection results is almost the same when detection LB diseases shown in Fig. 29a and Fig. 30a, however for detection BB diseases the results in Fig. 29b is better than results in Fig. 30b.

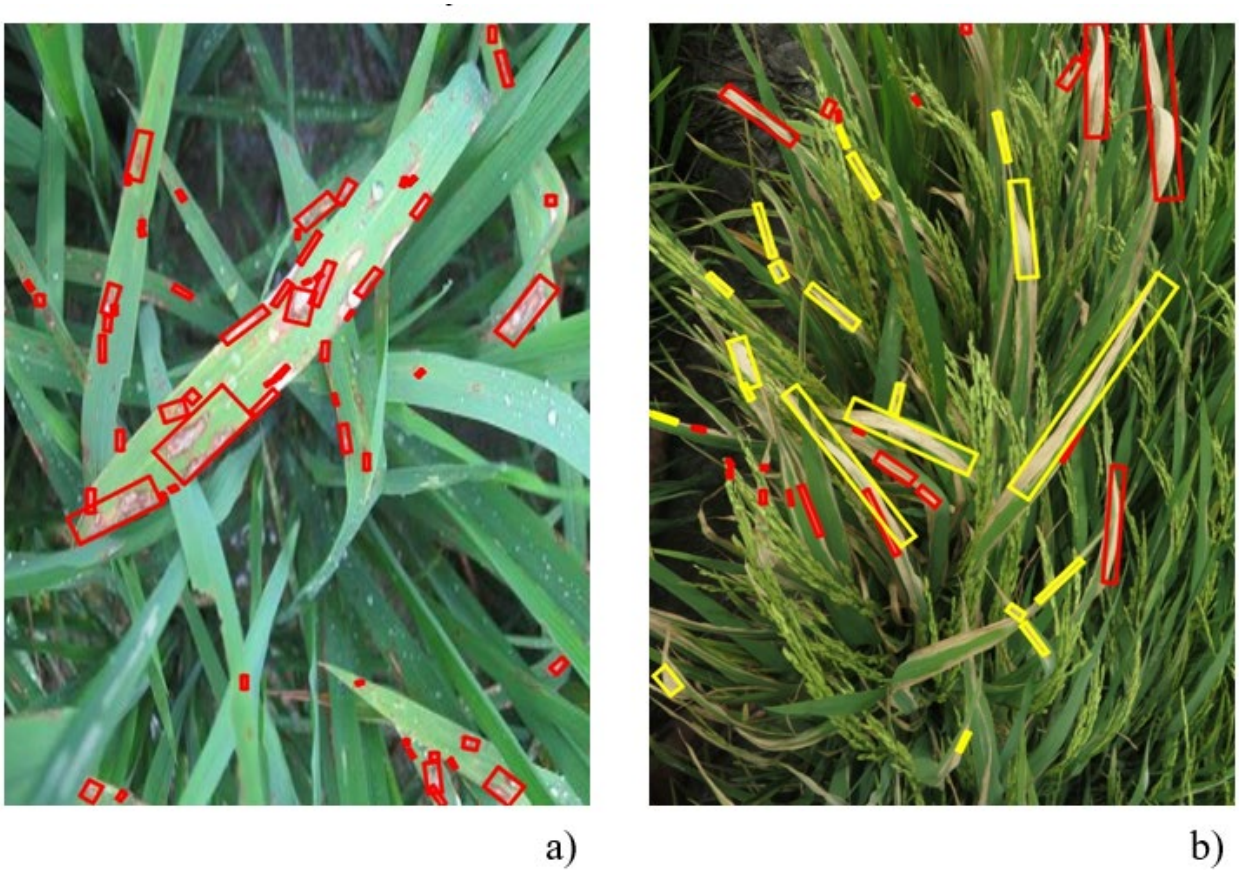

Fig. 30 LB and BB disease detection results by KNN method.

a) LB disease in the tillering stage. b) BB disease in the flowering stage.

VMD is the biggest rice cultivate in Vietnam, which is 3.8 million hectares including 12 provinces. Especially, some provinces can yield triple-cropped rice per year such as An Giang, Dong Thap, Vinh Long, Can Tho, Hau Giang and Tra Vinh. Therefore, the amount of fungicide application in a province with high density of crop rice becomes high on a year basis. By successfully detecting two common dangerous diseases in this study, a smart sprayer machine will be developed; which can spray only on a specific treatment area, which can help to reduce the amount of the fungicides by 70% - 80%. This helps to reduce the chemical residue effects in the environment and to increase the income of the farmers in this area.

3.4 Conclusion

This study demonstrates that the Gaussian Naïve Bayes classifier method is better than the KNN algorithm method for detecting two kinds of diseases, rice blast disease and bacterial blight disease, in the early stages under uncontrolled illumination conditions. This study also discusses the effects of color features (RGB, HSI) and shape features on the detection accuracy of the two methods. Both methods are able to detect both kinds of disease, though with different levels of accuracy and different processing times. The Gaussian Naïve Bayes method has the advantages of high accuracy and a low processing time. Although the present results were satisfactory, however, this method might yield lower accuracy when disease lesions become wide and blend, or when lighting conditions change or the spraying machine's speed increases. As future work, it is proposed to improve the processing time. Also, a new mechanical design is required to improve the balance and reduce the vibration on the camera.

Chapter 4 Development of a smart sprayer utilizing a commercialized sprayer

In this chapter was introduced a prototype smart sprayer of herbicide to the weed and fungicides to the fungal disease in rice field. The smart sprayer consist of RGB camera were connected via USB 3.0 to a laptop. The cameras were capable of capturing the images and custom software was develop for processing the images to detect weeds and diseases in real-time. The triggering signals were sent to the nozzle where the weeds or diseases had been detected.

4.1 Introduction

Rice yields are highly dependent on agrochemicals (herbicides, fungicides, and insecticides) for adequate weed, diseases and insect control. Traditionally, these agrochemicals are applied uniformly without considering significant bare spots and weed patches that exist within fields. The repeated and excessive use of agrochemicals not only increases the cost of production, but it is also impacting to environment, for health human, for natural landscape, and rice plants. (Chau et al., 2015; Toan et al., 2013) reported that all investigated water sources in the VMD have been shown to contaminated by pesticides. Local population in rural area still use all available water sources for their daily needs including drinking. Therefore, the face of currently used pesticides under different conditions needs to be further investigated. Despite the available options to reduce pesticide residue concentration in water resources, prevent pollution should be a priority. Although there are several solutions to reduce pesticide residue in water by cheap material such as bamboo (Thuy et al., 2012). However, the more sustainable solution and the best way is to reduce the amount of pesticides introduced to the environment from agriculture activities.

Many researchers have attempted to develop variable rate technologies for various crops. (Zaman et al., 2014) proposed the variable rate sprayer proved very efficient for in-season spot-

application of herbicides to eradicate tall weeds <55cm (taller than plants) in wild blueberry fields. The sensor for detection the weed on this research base on segmentation images input from ultrasonic camera. Although the percent area coverage of the sprayed targets with spot-application and uniform application was limited on the taller weeds in both fields and chemical spraying at early weed growth stage is needed to avoid less spray coverage on the taller weeds, it should be possible to increases the variable rate sprayer's performance to achieve enough coverage on weeds.

(Tian et al., 1999) proposed a real time machine vision sensing system with an automatic herbicide sprayer to create an intelligent sensing and spraying system and testing in corn fields. Multiple video images (hyper spectral camera) were used to cover the target area. Each camera was controlled 6 individual nozzles. The integrated system was tested to evaluate the effectiveness and performance under varying field conditions. With the current system design and 0.5% weed coverage as the control zone threshold, herbicide saving of 48% could be realized.

Another research, precision spot spray system using image analysis and plant identification in sugarcane (Rees et al., 2009). This research was used an RGB camera to collect the image and processing for segmentation base on analysis the different color of weed and number of edge detection on target detection areas. The image analysis operating at nighttime with the white LED illumination produced satisfactory results on mature green panic and guinea grass. However, the algorithm did not perform satisfactorily for smaller weeds or sugarcane. This research was successfully demonstrated to be effective at precision application. The cost benefit analysis demonstrated potential significant cost saving to grower though reduced chemical and weed management costs while providing beneficial outcomes to the environment through reduced chemical application.

Many precision spraying applications was success for vegetable. However, rice field is a

biggest cultivate land still less a smart sprayer system which help used less pesticides. In this study, we want to development a smart sprayer machine can work in rice field which is hard condition such as soft field and low soil compact. The image processing for detection two kinds weed on early stage namely broadleaf weed and narrow leaf weed, fungal leaf blast disease and bacterial disease on early stage in rice field was tested and estimated.

4.2 Materials and methods

4.2.1 Smart sprayer hardware component

a) Simple smart sprayer prototype

A simple sprayer prototype was built for this study with the purpose of testing the effectiveness of the detection algorithm and explore the possibility of implementing into real life applications. Since the algorithm can detect two different types of weeds, two different types of herbicide can be applied. Fig. 31 a) shows the full design in 3D and Fig. 31 b) shows the real prototype. The prototype was built on a steel table (0.9m length, 0.7m width, 0.8m height) which can move smoothly on 4 wheels placed on its legs.

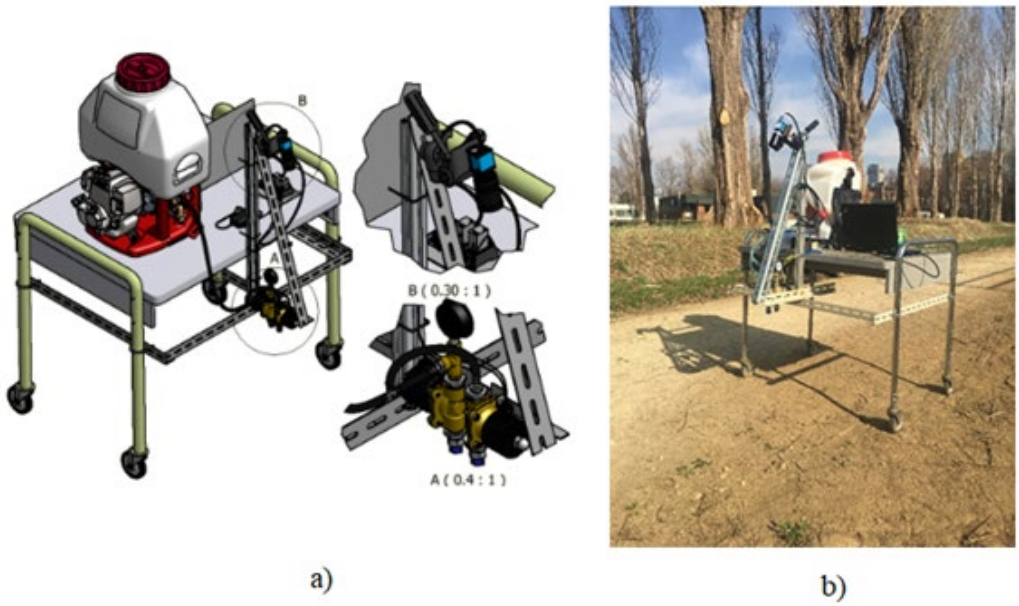

Fig. 31 Sprayer prototype.

a) Prototype on 3D design of Inventor software. b) Real prototype

All the components and equipment of the prototype are shown in Fig. 32; An industrial camera (The Image Source, DFK33UX264) equipped with a 6 mm lens (Angle of view: 70.7 deg.) was used to capture high resolution red, green, and blue (RGB) images 2448 x 2048 pixels in size. The industrial camera was connected to a laptop computer (Lenovo, ThinkPad X220) by USB 3.0 port to capture the input images; a microcontroller board (Arduino Uno R3) is used as a controller, it was connected with laptop computer by USB 2.0 port for transfer the internal input and output. Two digital outputs pin of the Arduino Uno were connected to 2 solid state relays (Omron G3FD-X03SN). Finally, A direct acting solenoid valve types (Hengyang solenoid valve 2W-160-15) which is fast response time (5 to 10 milliseconds), was connected with relay. The backpack sprayer (Maruyama GS10R) was used for making the pressure spray of the prototype, and pressure gauge (0-1400 kPa) using for checking pressure spray. When the image processing algorithm detects kinds the weeds, the program will send a command to the Arduino Uno to activate the output signal to control the independent solenoid valve for each kind of weed on the sprayer.

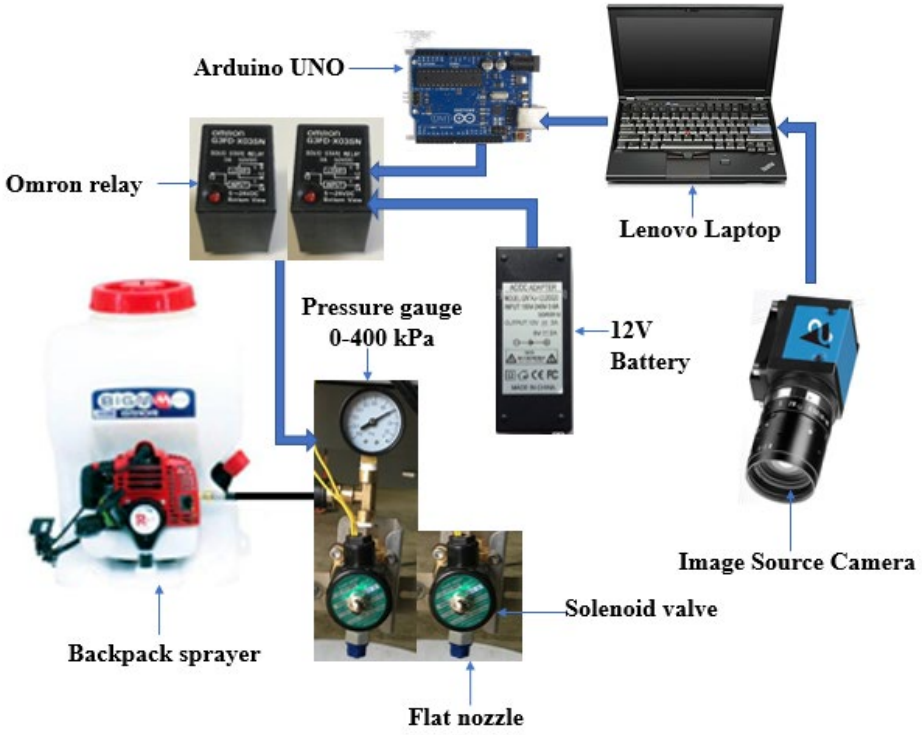

Fig. 32 Accessories equipment and connection diagram of prototype.

Although, this is a simple design and practice of machine vision for real-time detection the object, it cannot practice on real condition in the field. However, thought on that it is first step for help to know clearly about the response time of the processing program to nozzle sprayer, what is an effected of machine vision and so all. It is an important experiment for development smart sprayer on utility sprayer which can work on real condition in the field.

b) Smart sprayer prototype in utility machine

The prototype smart sprayer is operated with a utility vehicle (Sprayer version, Iseki JK-14) as Fig. 33 which have 10.7 kW, four-wheel drive and four-wheel steering system (4WS). The vehicle works well for both upland and paddy fields because of its high ground clearance. Component of smart sprayer included one Imaging Source digital color camera (DFK33UX264) with a 6 mm lens (Angle of view: 70.7 deg.), laptop computer (PC) with custom image processing software, Arduino UNO mainboard, Arduino replay (8 relays), eight solenoid valves and eight flat nozzles (Fig. 34).

Fig. 33 Utility vehicle (Iseki JK-14).

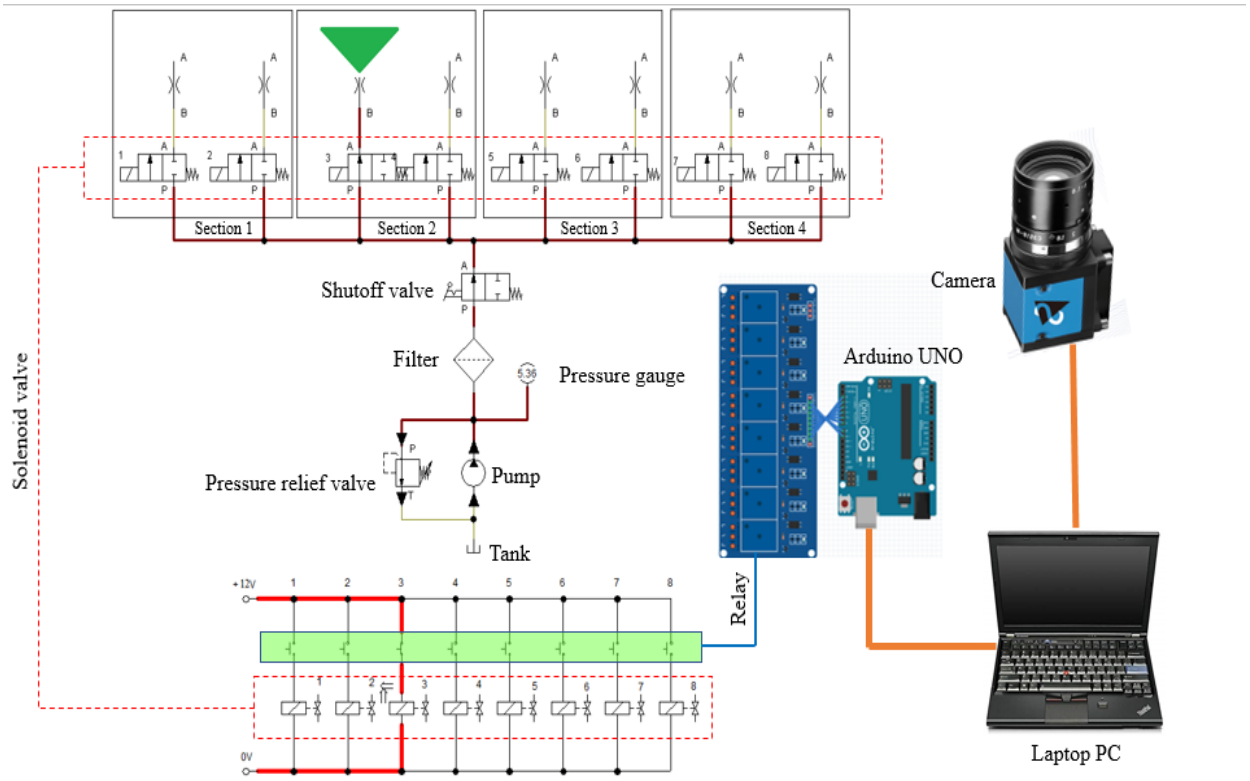

Fig. 34 Schematic diagram showing the main component of machine vision and individual nozzle section control setup.

The 1.5 m V slotted angle (40x40 mm) bar was divided into 4 section with 0.4 m in each section. Two solenoid valve and nozzle were installed on each section of the boom. A series of the tee

joint connected the distribution valve to each section. Each nozzle was able to spray in 0.4 m wide of 1.5 m sprayer boom. The boom height above the ground surface was 0.5 m. The camera was fixed with tripod and install on bar above 0.75 m to the nozzle. The camera covered four section (1.6 m). Camera were attached using USB cables to the laptop PC. Fig. 35 shown a detail an assembly of sprayer boom and camera below.

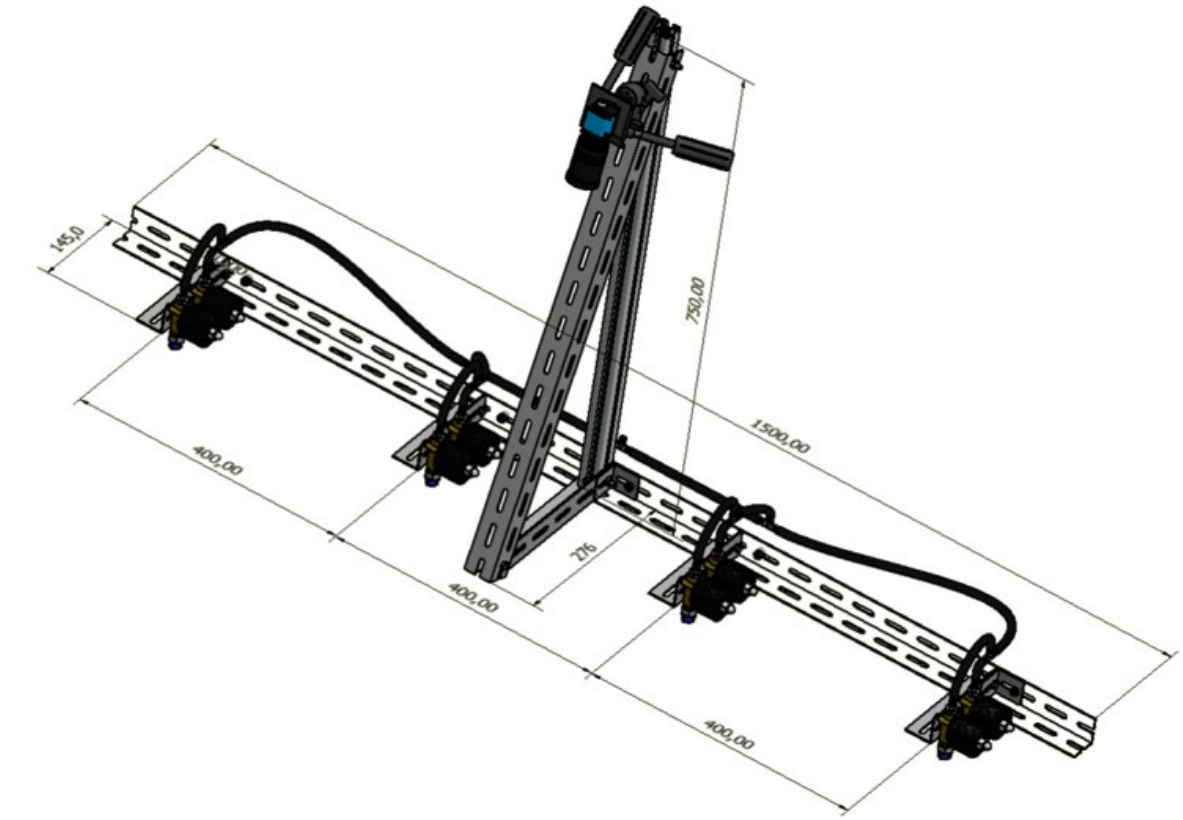

Fig. 35 Sprayer boom and camera mounting design.

The sprayer boom was attached into the Iseki machine (Fig. 36). The laptop PC and controller unit (Arduino UNO and relay) was mounted on top and head of machine. The camera was connected with PC by USB 3.0 port. The controller unit was connected with PC by USB port and directly connection to each solenoid valve for individual control. The sprayer tank size was 400 litter. The pistons diaphragm pump was power by the Iseki machine power PTO. The pump can make pressure from 5 kg/cm^2 to 23 kg/cm^2. The manual adjustment relief valve was used

to control pressure spray. The feed line from the pump went through a flow valve, particle filter. The line was then separated into three section (left, right and middle). However, I was only used line in middle in this experiment. The 2/2-way solenoid valve (SYPC Senya, normally closed) was directly connected with plastic flat fan spray nozzle (DealMux-Flat Jet nozzle).

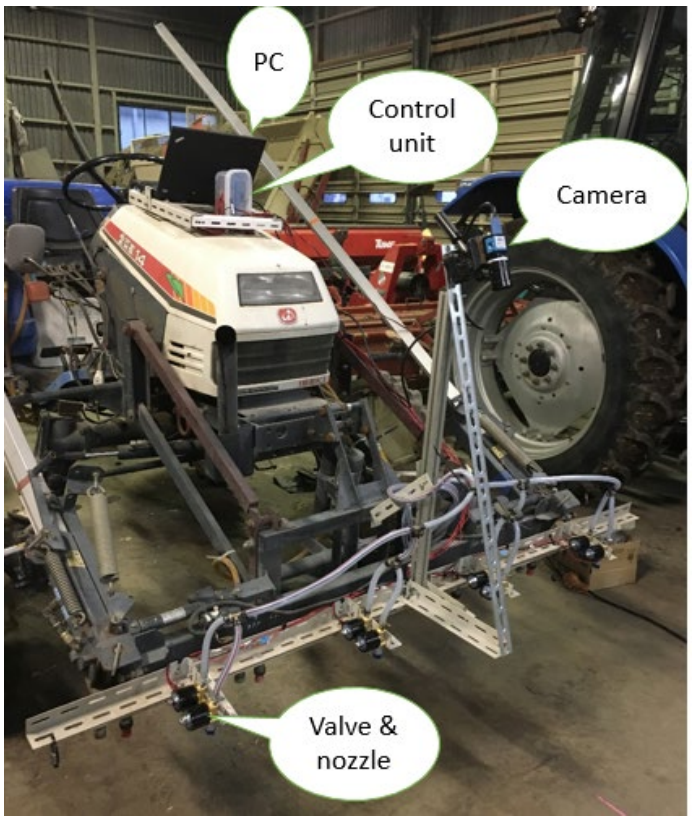

Fig. 36 The experiment setup of sprayer system into Iseki machine.

4.2.2 Image processing hardware and software development

Real-time detection hardware consisted of one Imaging Source camera connected via 3.0 m length USB 3.0 active extension cable to a 2.8-gigahertz (GHz) Intel ® Core™ i7-2640M central processing unit (CPU) and 8 gigabit (GB) random access memory (RAM) computer. Active extension USB cables were used to ensure proper connectivity over the extended distance (3.0 m). A 500 GB serial advance technology attachment (SATA) solid state disk flash drive was installed to ensure the durability and performance when operating in rough field conditions. A power inverter was installed in the utility vehicle cabin to power the laptop PC

and solenoid valves. The wide-angle field of view lenses had a 6 mm focal length were set up with a fixed aperture and infinity focuses. To manual adjust for the variable outdoor light conditions. Multiple selection area detection software was developed in C++ using Visual Studio 2015 and OpenCV-3.4.1 (Fig. 37). The software interface shown out for user to know the number of the different kinds of object detection and number of sprayer when the object passes through the detection line.

The software acquires RGB 2048 x 1024 pixels images corresponding to a 1.6 x 0.8 m^2 area of interest from the camera. From the region of interest (ROI), software devised to 4 areas with the same size and set up the detection line at 0.7 x frame height size. The detail of algorithm for image processing was described in chapter 2 and chapter 3.

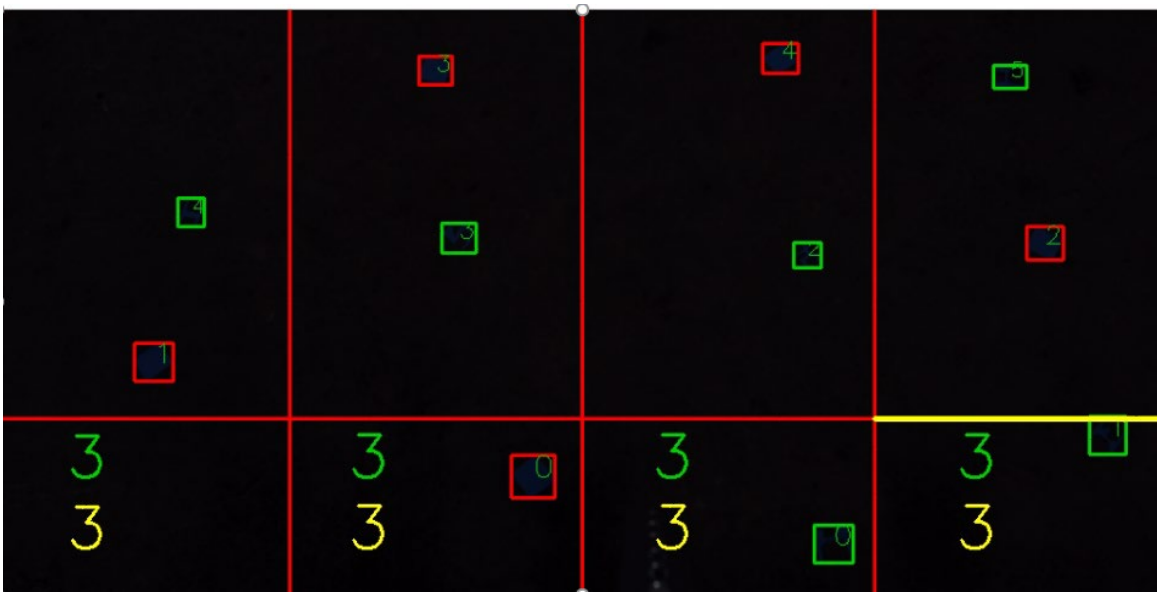

Fig. 37 Image processing program user interface development for see the number of detection and count number of sprayers.

The software was used Arduino IDE (Arduino 1.8.12) for control the solenoid valve through by relay. From the C++ and OpenCV image processing for detection different kind of object on each section and check the object detected pass on the detection line or not. If the object detected cross on line the program sent a command line to communicate with the Arduino, then

to open solenoid valve corresponding with the object (Fig. 38).

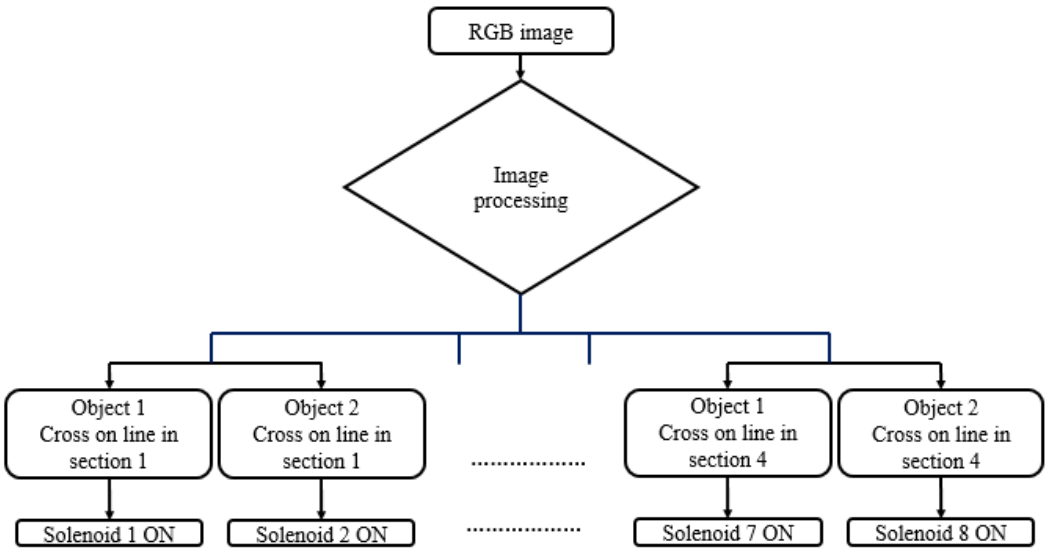

Fig. 38 Device section and individual control nozzle.

4.3 Result and discussion

In this experiment, we do not use flow rate sensors to measure the amount of sprayer (litter). Instead of that we are calibration the volume of each sprayer, then through on the program will count the total number of sprayers, so that the volume of sprayer be equal total number sprayer multiple volume of each sprayer. Doing that the pressure spray was set the same condition with sprayer operation on the field (10 Kg/cm^2), each nozzle was setting for 100 sprayers, then using volumetric measuring instrument to measure (Fig. 39). The volume of 100 times sprayer is 0.7 litter, so each sprayer is 0.007 litter.

Fig. 39 The calibration of volume of each sprayer.

The nozzle is critial part of sprayer, it determine the rate of pesticide distribution at a particular pressure, forward speed and nozzle spacing. Every spray nozzle pattern has two basic charateristics: the spray angle and the shape of the pattern. In this experiment, the flat-fan nozzle type was used, the spray angle is 51 degree, and cover areas 0.1 x 0.46 m with 0.5 m height (Fig. 40).

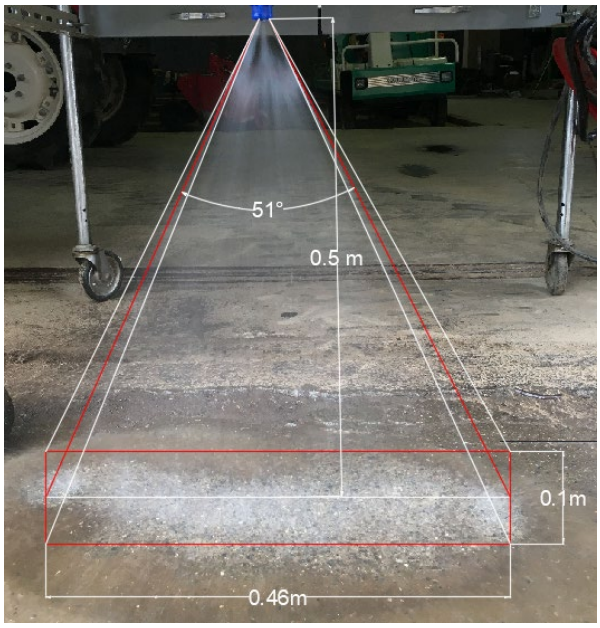

Fig. 40 The calibration ROI of nozzle.

Flat-fan nozzle are widely used for spot spraying of the herbicides and fungicides. They produce a tapered-edge, flat-fan spray pattern. Less material is applied along the edges of the spray pattern, so the patterns of adjoining nozzles must be overlapped go give uniform coverage over the length of the boom. For this expriment, we set the overlap is 0.06 m. The detail show on Fig. 41.

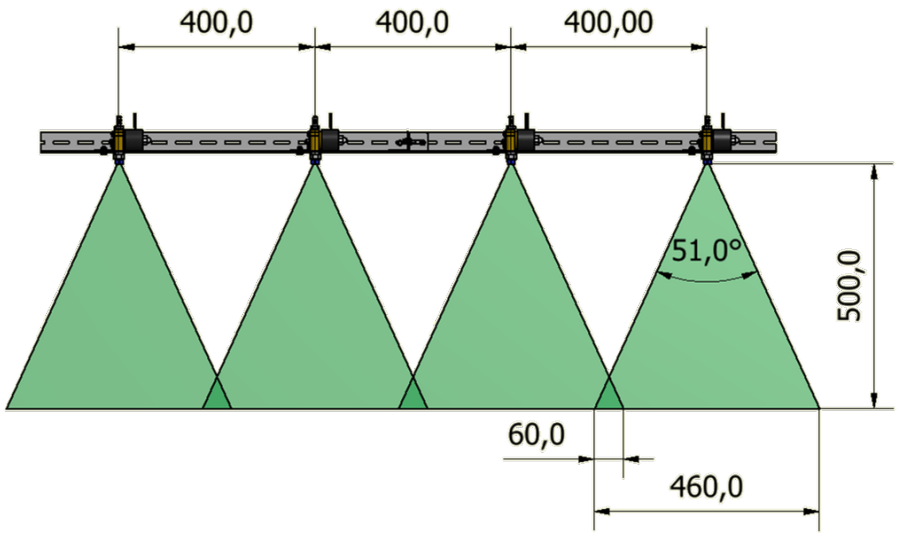

Fig. 41 Proper overlap with a flat-fan type nozzle on 0.4 m nozzle spacing.

An experiment was conducted in the warehouse to calculate response time (i.e. lag time between the camera detection and spray discharge time) for the program. Camera image acquisition time combined with image processing time, relay and solenoid was made the response time. The distance between detection line on the programe and nozzle was set at 0.4 m. A smart phone camera was recorded with 60 frame per seconds when the machine moving and sprayer. Some sample (paper color) random put on the ground as Fig. 42. The mark 10 meters long was make for measure the distance when machine moving. The experiment was repeat many time with the differnet speed and the video were recorded. We checked the correct position of the sprayer ROI and object detection for each speed of machine. When the possition is corrected, it mean the object detection on the center of ROI, the video was analysis for

calculated the velocity by machine moving on distance per time recorded. And then the response time was calculate by 0.4 device velocity. In this experiment, the response time is 0.6 seconds at 0.65m/ s of speed. The result show on Fig. 42.

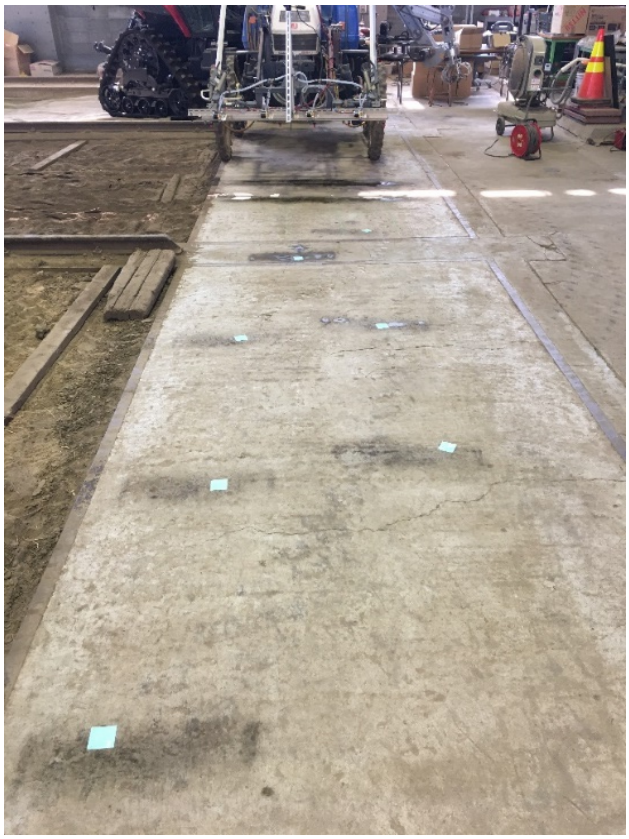

Fig. 42 Experiment of real time detection and sprayer.

Although, the experiment was only test indoor condition with the sample object. However, the experiment help to know clearly the full system of smart sprayer from detection by camera and application pesticide by nozzle sprayer with using cheap equipment. The program still help limited, it just work well at one speed, if the speed is lower or faster the location of sprayer will not corrected. So for future, the propram will automatic to change the detection line base on the speed to make sure presion of sprayer. The experiment need to practice on real condition in rice field on uncontrol light condition. Other, the system need to using good equipment for inrease time life and derease the response time.

4.4 Conclusions

The sensing and control system of the prototype commercial smart sprayer proved to be very efficient at detecting two kind of weeds and spraying correctly at target areas with an actual lag time of 0.6s. Although, the system does not use flow sensor for measurement the sprayer's volume. However, through on calibration volume of each sprayer and counting number of weeds or disease by detection program provides the monitor density of object detection in field. Based on the results of this study, the prototype commercial smart sprayer performed well for targeting weeds and disease in rice fields.

The successful target applications of the developed smart sprayer resulted in an increased interest within rice field farmer's community, as they could see the benefits of this technology. However, one of their concerns about the developed sprayer was that it can only work during daytime and wind speed is typically low. In addition, the productivity is not high due to moving speed low for adapted detection accuracy. In order to address this industrial need and make this smart sprayer an effective option for rice field growers, an artificial light source system was required to be developed and implemented into the smart sprayer to perform agrochemical application in any condition.

Chapter 5 Conclusions and recommendations

5.1 Conclusions

The overall goal of this study was to develop and evaluate a smart sprayer for spot application of agrochemicals for field rice production. An integrated automated system comprising of Image source digital color cameras, a laptop PC, custom image processing software, Arduino UNO main board and relay, individual nozzle control using solenoid valves was developed. The developed system (hardware and software) was incorporated onto a traditional sprayer along with the Iseki sprayer for real-time spot-application of selected agrochemicals primarily used for rice field.

The key smart sprayer components were tested in the vehicle robotics laboratory. Results of calibrations performance testing that the developed smart sprayer was effective method for spot-application of agrochemical. Result confirmed that the smart sprayer system was more cost-effective and easier to operate with cameras mounted near nozzle sprayer. The machine vision system was be able to operate fast enough to open spray nozzles with d distance 0.2 m between the line detection on the camera and the spray nozzle.

Although it is limited because it has not been practical in the field of rice fields in Vietnam. However, the machine vision of image processing program for detection two kinds of weeds (broadleaf and narrow leaf weeds) was based on bounding blob analysis and detection two kinds of diseases (leaf blast and bacterial blight) based on mean color and shape feature analysis has been tested in real videos and images recorded from Vietnam. The results show that the detection success with high accuracy (broadleaf: 95.4%, narrow leaf: 87.1%, leaf blast: 89.23 %, bacterial blight: 91.11 %) and short processing time (0.3 second per frame), this is suitable for real-time sprayer development.

An economic analysis comparing a basic sprayer to precision control sprayer as well as

proposed smart sprayer gave the perspective cost benefits of technology. According to Vietnam Pesticide Association (VPA) reported on 2015 show that pesticide consumption using is 1.23 billion USD/ year and it will be increase around 2-3% per year. The amount of pesticides used in rice production account for 64.9%. The smart sprayer system can reduce high amount of pesticides. Depending on density of treatment areas, it can reduce 70-80% amount of pesticides. So that we can reduce around 0.5 billion USD/ year. It will be helpful to increase farmer's income and reduce an effected to environment condition.

5.2 Recommendations

In this study, the smart sprayer used simple and cheap equipment with short life operation. Future need to select good equipment with stability and long-life operation. The cameras have vibration that is make unclear images and effected to detection accuracy, camera should be using an isolation to reduce vibration.

Further improvements can be increase detection accuracy of the image processing software and reduce time processing. The program can automatically change the detection line to precision spot spray based on speed of sprayer system moving. Other improvements could be adding a streamlined graphical interface that allows the user tabs that adjust the content being displayed on the screen. It would be essential for the commercial application to have software with the ability to be user programmable allowing for the increase or decrease in number of smart sprayer cameras based on the sprayer boom width.

This study was designed for the rice field, but the same technology could be applied in other cropping system that require spot-application at specific target locations. Farmers growing row crops looking to reduce the amount of herbicide application to non-target areas could benefit from adaptation of the smart sprayer technology. A technology transfer may be applicable for golf courses that need spot treatment of different herbicides, fungicides or fertilizers based on

the conditions.

5.3 Contributions to knowledge

This PhD thesis presents the development a smart sprayer system for the rice field cropping system. An integrated machine vision system with custom image processing software equipped with a custom control box and fast acting solenoid valves for individual nozzle control was developed and mounted on a farm tractor for spot-applications of agrochemicals. Many researchers have tested spot-sprayers for a variety of different crops. However, the rice field cropping system has had little focus from a research and development perspective of smart spraying technologies.

An engineering design process was utilized that started with defining the problem of excess agrochemicals being applied uniformly to rice fields. Idea generation and brainstorming involved a literature search of related technology used to address over application of agrochemicals in non-target areas in other cropping systems. A list of possible solutions to the problem was developed and after choosing the most feasible option, a prototype was developed based on the design criteria. The prototype was tested and evaluated with a series of lab. After a sequence of refinements and re-evaluations, each step of the engineering design process has been an important stage in improving the design and functionality of the smart sprayer system. The original smart system involved an added one sensor of cabling and control two nozzles. The smart sprayer was refined by increase the nozzle number on one sensor. The smart sprayer system in its latest stage is fairly simplistic in terms of components required for converting from a typical commercial agricultural boom sprayer. This simplification and refinement of the smart sprayer through the various stages of the engineering design process have led to a unique and practical solution for spot applications of agrochemical for the rice field cropping system. Long time ago many rice fields could be grown without the need for intense and precise herbicide and fungicide applications. However, with some weeds, diseases, and pest becoming

more resistant to pesticides applications and the increased yields, the farmers are applying more and more inputs to their fields. At the same time many farmers are realizing the issues with uniform blanket applications that can lead to soil erosion and environmental contamination. The uniform application of agrochemical is also costing amount of money (1.6 billion USD per year). This trend has sparked its initiative to develop a smart sprayer technology to lower the amount of inputs while still maintaining maximum output yields.

Knowledge of the various components included with the smart sprayer could be adapted for use and application for other cropping systems for lowering input requirements. The same technology could be adapted for use with fertilizer spreaders to apply more appropriate rates based on the real-time field variations that commonly exist. A database collected from the smart sprayer could be compiled each year to determine the effectiveness of the agrochemicals being applied. The data could also be compared to yield

maps to determine relationships between the different inputs, and their impact on the yield to propose best management practices.

The rice production aims to increase harvestable yields at lower production cost, which can be achieved by adopting this technology. This PhD project is unique, as it directly addresses one of the major industrial problems. This research has found that spot applications of agrochemicals on target locations has the ability to increase harvestable yields while at the same time lowering agrochemical inputs. Results has shown a significant reduction in producer cost required for agrochemical input using the smart sprayer as compared to the uniform amounts of agrochemicals applied on commercial rice fields. Adoption of this smart sprayer for commercial agrochemical applications can increase profit margins for rice field farmers, with the added advantage of achieving sustainable production, which is of paramount importance in the evolving world.

References

Aktar, M. W., Sengupta, D., & Chowdhury, A. (2009). Impact of pesticides use in agriculture: their benefits and hazards. Interdiscip Toxicol, 2(1), 1-12.

Aravind, R., Daman, M., & Kariyappa, B. S. (2015). Design and development of automatic weed detection and smart herbicide sprayer robot. Paper presented at the 2015 IEEE Recent Advances in Intelligent Computational Systems (RAICS) conference, Trivandrum, India, 257-261.

Archana, S., & Cchabra, A. (2014). Comprehensive review of denoising techniques in image restoration. International Journal of innovative research in computer and communication Engineering, 2(6), 4597-4602.

Bakar, M. A., Abdullah, A., Rahim, N. A., Yazid, H., Misman, S., & Masnan, M. (2018). Rice Leaf Blast Disease Detection Using Multi-Level Colour Image Thresholding. Journal of Telecommunication, Electronic and Computer Engineering (JTEC), 10(1-15), 1-6.

Balgude, Y. S., & Gaikwad, A. P. (2019). Integrated management of blast of rice. International Journal of Chemical Studies, 7(1), 1557-1563.

Barrero, O., Rojas, D., Gonzalez, C., & Perdomo, S. (2016). Weed detection in rice fields using aerial images and neural networks. Paper presented at the 2016 XXI Symposium on Signal Processing, Images and Artificial Vision (STSIVA) conference. Bucaramanga, Colombia, 31-34.

Bora, D. J., Gupta, A. K., & Khan, F. A. (2015). Comparing the performance of L* A* B* and HSV color spaces with respect to color image segmentation. International Journal of Emerging Technology and Advanced Engineering (IJETAE), 5(2), 192-203

Bossu, J., Gee, C., & Truchetet, F. (2008). Development of a machine vision system for a real time precision sprayer. Electric Letter on Computer Vision and Image Analysis (ELCVIA), 7(3), 54-66.

Bradski, G., & Kaehler, A. (2008). Learning OpenCV: O'Reilly Media, Inc., 1005 Gravenstein Highway North, Sebastopol, California, 222-264.

Brahmbhatt, S. (2013a). Practical OpenCV. New York: Apress.

Brahmbhatt, S. (2013b). Practice OpenCV. New York: Apress.

Burgos-Artizzu, X. P., Ribeiro, A., Guijarro, M., & Pajares, G. (2011). Real-time image processing for crop/weed discrimination in maize fields. Computers and Electronics in Agriculture, 75(2), 337-346.

Caton, B. P., Mortiner, M., Hill, J. E., & Johnson, D. E. (2010). A Practice Field Guide to Weeds of Rice in Asia, Second Edittion, IRRI, Phillipines, 22-114.

Chau, N. D., Sebesvari, Z., Amelung, W., & Renaud, F. G. (2015). Pesticide pollution of multiple drinking water sources in the Mekong Delta, Vietnam: evidence from two provinces. Environ Sci Pollut Res Int, 22(12), 9042-9058.

Chin, D. (1995). Present status of herbicide use in Vietnam. Paper presented at the Proceedings of the 15th Asian-Pacific Weed Science Society Conference (Tsukuba, Japan, 24-28 July 1995), Tsukuba, Japan.

Chin, D., & Mortimer, M. (2002). Weed management in direct-seeded rice in South Vietnam. Direct seeding: research strategies and opportunities. Los Banos, Philippines: International Rice Research Institute, 349-356.

Chin, D. V. (2001). Biology and management of barnyardgrass, red sprangletop and weedy rice. Weed Biology and Management, 1(1), 37-41.

Cover, T., & Hart, P. (1967). Nearest neighbor pattern classification. IEEE transactions on information theory, 13(1), 21-27.

dos Santos Ferreira, A., Matte Freitas, D., Gonçalves da Silva, G., Pistori, H., & Theophilo Folhes, M. (2017). Weed detection in soybean crops using ConvNets. Computers and Electronics in Agriculture, 143, 314-324.

Dung, N. H., & Dung, T. T. T. (1999). Economic and health consequences of pesticide use in paddy production in the Mekong Delta, Vietnam. EEPSEA research report series/IDRC. Regional Office for Southeast and East Asia, Economy and Environment Program for Southeast Asia.

Dyrmann, M., Jørgensen, R. N., & Midtiby, H. S. (2017). RoboWeedSupport-Detection of weed locations in leaf occluded cereal crops using a fully convolutional neural network. Advances in Animal Biosciences, 8(2), 842-847.

EdjeElictronic. (2019). TensorFlow-Object-Detection-API-Tutorial-Train-Multiple-Objects-Windows-10, The open source from https://github.com/EdjeElectronics/TensorFlow-Object-Detection-API-Tutorial-Train-Multiple-Objects-Windows-10

FAO. (2005). Food and agriculture organization of the united nations regional office for aisa and the pacigic: http://www.fao.org/3/af340e/af340e00.htm#Contents, at 2. Country Reports, 2.17 Viet Nam.

Francisco, E., Zahirul, I. (2003). Diagnosis of common diseases of rice. IRRI, Phillipines, 13-22.

Gonzalez, R. C., & Woods, R. E. (2002). Digital image processing, Second Edittion, Prentice Hall, Upper Saddle River, 523-527.

Hai, L., Kim, P. V., Du, P. V., & Thuy, T. (2007). Grain yield and grain-milling quality as affected by rice blast disease (Pyricularia grisea), at My Thanh Nam, Cai Lay, Tien Giang. Omonrice, 15, 102-107.

Heap, I. (2019). International survey of herbicide-resistant weeds, from http://www.weedscience.org/, Accessed Jan 28, 2019.

Huang, J., Rathod, V., Sun, C., Zhu, M., Korattikara, A., Fathi, A., Fischer, I., Wojna, Z., Song, Y., & Guadarrama, S. (2017). Speed/accuracy trade-offs for modern convolutional

object detectors. Paper presented at the Proceedings of the IEEE conference on computer vision and pattern recognition, 3296-3305.

IRRI. (2018). Herbicide - when to apply, from http://www.knowledgebank.irri.org/step-by-step-production/growth/weed-management/herbicides, Accessed Jan 28, 2018.

IRRI. (2019). Weed management. Rice knowledgement bank, from http://www.knowledgebank.irri.org/step-by-step-production/growth/weed-management, Accessed Jan 28, 2019.

IRRI. (2020). Disease and pest resistant rice, from https://www.irri.org/disease-and-pest-resistant-rice, Accessed Jan 28, 2020.

Islam, T., Sah, M., Baral, S., & RoyChoudhury, R. (2018). A Faster Technique on Rice Disease Detectionusing Image Processing of Affected Area in Agro-Field. Paper presented at the 2018 Second International Conference on Inventive Communication and Computational Technologies (ICICCT), Coimnatore, India, 62-66.

Archana, K, S., Sahayadhas, A. (2018). Automatic rice leaf disease segmentation using image processing techniques, 7(3.27), 182-185.

Lu, Y., Yi, S., Zeng, N., Liu, Y., & Zhang, Y. (2017). Identification of Rice Diseases using Deep Convolutional Neural Networks. Neurocomputing Jounral, 267, 378-384.

Mique, E., & Palaoag, T. (2018). Rice Pest and Disease Detection Using Convolutional Neural Network. International Confernce on Information (ICSS), Jeju, Republic of Korea, 147-151.

Mitchell, T. (1997). Machine Leaning. McGraw-Hill, 154-199.

Nguyen, T. H. (2017). An Overview of Agriculture Pollution in Vietnam: The Crops Sector. The World Bank's Agriculture and Environment and Natural Resources Global Practices.

Nnolim, U. A. (2015). Design and implementation of novel, fast, pipelined HSI2RGB and log-hybrid RGB2HSI colour converter architectures for image enhancement. Microprocessors and Microsystems, 39(4-5), 223-236.

Rees, S., McCarthy, C., Artizzu, X., Baillie, C., & Dunn, M. (2009). Development of a prototype precision spot spray system using image analysis and plant identification technology. Paper presented at the Proceedings of the 2009 CIGR International Symposium of the Australian Society for Engineering in Agriculture (SEAg 2009).

Ren, S., He, K., Girshick, R., & Sun, J. (2015). Faster r-cnn: Towards real-time object detection with region proposal networks. Paper presented at the Advances in Neural Information Processing Systems (NIPS) conference, Montreal, Canada.

Rijal, S., & Devkota, Y. (2019). A review on various management method of rice blast disease. Malysian Journal of Sustainable Agriculture (MJSA), 4(1), 14-18.

Sato, J.-i., Shigeta, K., & Nagasaka, Y. (1996). Automatic operation of light tractor with sprayer in paddy fields. JARQ (Japan).

Savary, S., Willocquet, L., Elazegui, F. A., Castilla, N. P., & Teng, P. S. (2000). Rice pest constraints in tropical Asia: quantification of yield losses due to rice pests in a range of production situations. Plant disease, 84(3), 357-369.

TensorFlow's Visualization Toolkit. (2018). TensorBoard Key Concepts Summary Ops : How TensorBoard gets data from TensorFlow, from https://github.com/tensorflow/tensorboard

The Imaging Source Asia Co., L. (2019). DFK 33UX264 USB 3.0 color microscope camera, from https://www.theimagingsource.com/products/microscope-cameras/usb-3.0-color/dfk33ux264/

Thuy, P. T., Anh, N. V., & Van der Bruggen, B. (2012). Evaluation of Two Low-Cost–High-Performance Adsorbent Materials in the Waste-to-Product Approach for the Removal of Pesticides from Drinking Water. CLEAN–Soil, Air, Water, 40(3), 246-253.

Tian, L. (2002). Development of a sensor-based precision herbicide application system. Computers and Electronics in Agriculture, 36(2-3), 133-149.

Tian, L., Reid, J. F., & Hummel, J. W. (1999). Development of a Precision Sprayer for Site-Specific Weed Management. Transactions of the ASAE, 42(4), 893-900.

Toan, P. V., Sebesvari, Z., Blasing, M., Rosendahl, I., & Renaud, F. G. (2013). Pesticide management and their residues in sediments and surface and drinking water in the Mekong Delta, Vietnam. Sci Total Environ, 452-453, 28-39.

Zaman, Q. U., Esau, T. J., Schumann, A. W., Percival, D. C., & Chang, Y. K. (2014). Prototype Variable Rate Sprayer for Spot-Application of Agrochemicals in Wild Blueberry. Applied Engineering in Agriculture, 717-725.

Zhang, L., Lin, L., Liang, X., & He, K. (2016). Is faster r-cnn doing well for pedestrian detection ?. European Conference on Computer Vision (ECCV), Amsterdam, Netherlands, 443-457.